

WEBASTO DIESEL & AUXILIARY HEATING



WEBASTO DIESEL/PETROL FIRED BLOWN AIR & SUPPLEMENTARY WATER HEATERS.

Regardless of the type of vehicle you use, webasto diesel powered heaters will meet all your needs.

- Easy to install maintain and operate.
- Economical to run, quiet operation.
- Powered from the vehicle's own fuel tank.
- Available as a comprehensive installation kit.
- Lower power consumption than comparable gas-powered blown air heaters.

AIRTOP BLOWN AIR HEATERS

The webasto Airtop heater range now comes with a RV kit. Specifically designed for the Motorhome, Caravan, Horsebox & Specialist vehicle use, the RV kit is comprehensive. The Universal kit includes Airtop heater 12 volt and main electrical harness, Fuel pump, Fuel pipe & fuel pump wiring harness, 5 x 8 x 5mm fuel tee piece and connectors, 1m of exhaust duct, clamps & exhaust silencer, combustion air intake pipe, installation instructions & fastenings. The blown air output ducting and vents, if required, must be ordered separately. The RV kit has all the components of a universal kit with the addition of remote temperature sensor probe, rotary controller & floor mounting plate. The blown air output ducting and vents, if required, must be ordered separately.

- WBDA201** Airtop 2000 (2 kw) 12v one outlet universal kit
- WBDA201RV** Airtop 2000RV kit (2 kw) 12v no ducting or vents
- WBDA39** Airtop 3900 EVO kit (3.5 kw) 12v no duct or exhaust pipe
- WBDA50** Airtop 5500 EVO (5 kw) 12v kit no ducting or vents
- WBDACT** Combi timer upgrade with harness for airtop 2000 RV
- WBS1** 55 mm warm air ducting / metre
- WBS2** 55 mm warm air ducting clips
- WBS3** 55 mm warm air outlet
- WBS4** 55 mm warm air ducting Y piece
- WBFSF** Fuel pick up stand pipe (only with heater orders)

THERMOTOP SUPPLEMENTARY HEAT SOURCE WATER HEATERS

If you want to be able to pre-warm the engine and heat water for domestic use as well as heat the interior of the vehicle, simply integrate a water heater into the coolant system. The unit works like a central heating system, warming up the coolant in the vehicle, passing it through the relevant heating system (calorifier, auxiliary blower or radiator) and then on to the engine. The temperature inside the vehicle is adjustable, and the warmth is distributed via the vehicle's own ventilation system or additional auxiliary blowers. What's more a pre-warmed engine prevents environmentally damaging cold starts and saves fuel. With their waterproof design, webasto heating systems can be installed almost anywhere in the vehicle. Installation of Thermo top kits will provide the heat source for radiators & auxiliary blown air heaters. For your kitchen and shower hot water needs the Nautic and Nautic XT calorifier water heaters (P122) will be heated by the Webasto or can be heated by their integrated electric immersion heaters when on site electric hook up.

- WBDTTE** Thermo top E 4kw 12v universal kit
- WBDTTC** Thermo top C 5kw 12v universal kit
- WBWS** Webasto rotary on/off switch
- WBFSF** Fuel pick up stand pipe (only with heater orders)

WBX100 WEBASTO X100 CERAN® DIESEL COOKTOP

The Webasto Diesel Cooker X100 will be of particular interest for those who intend to have only one fuel on board. Individualists will appreciate the usage of Diesel to cook during trips in the great outdoors.

The combustion of the diesel fuel creates heat which is conducted to a CERAN® cooking plate. The ceramic cooktop can be used with one cooking stove top and one for keeping meals warm (or warming up).

- 1,9 kW cooking power
- Using diesel out of vehicles fuel tank
- Very elegant look due to CERAN® cooktop
- Easy to clean
- Altitude switch for usage in heights above 1500 m
- Warning light indicates hot CERAN® plate

WEBASTO DUALTOP COMBI AIR WATER HEATER

The Dual Top will heat up both, your cabin and your domestic hot water. With up to 1.2 kW additional heating power (101 model only) due to the electrical coil the Dual Top can also be operated via the 230 V connection. This heater can be mounted underneath the vehicle, in the double floor as well as inside the motorhome. The boiler is automatically drained at frost temperatures when heater is switched off. Standard 100 model diesel only version without electric supplied with standard control. Dual Top 101 model is delivered with a digital wall control.

- 6 kW Diesel heating power (+1,2 kW electrical coil with 101 model)
- Integral 11litre hot water boiler with up to 70oC hot water.
- Using diesel directly from vehicles fuel tank
- Can be operated with 230 V connection
- Two simple frost protection systems
- Easy boiler drainage

- WBRHA-100** Dual top standard Diesel only- standard control
- WBRHA-101** Dual top Diesel – Electric power – digital wall control



Air Top 2000:


The smallest air heater on the market, and so quiet you'll hardly know it's there. Ceramic technology and optimum cost-effectiveness make this the most powerful heater in its class. Thermostat as standard.



Air Top 3500 / Air Top 5000:

Powerful, continuously adjustable temperature, compact and quiet, this heater is suitable for extreme conditions and will meet the highest demands. It saves space and can be installed easily in the cab or in the rear.

Thermotop C:
The latest ceramic technology delivers maximum reliability, while high heat output, low power consumption and low fuel consumption make this a comfortable and cost-effective investment

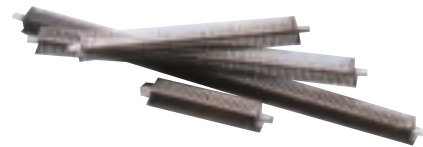

RADIATORS FOR AUXILIARY WEBASTO HEATERS

Aluminium finned tube radiators approx. 75mm square various lengths available. Output 400 watts per metre.

- AXRAD400** RADIATOR 400 MM
- AXRAD700** RADIATOR 700 MM
- AXRAD1000** RADIATOR 1000 MM



WEBASTO WBX100 DIESEL COOKTOP




DUALTOP 101 DIGITAL WALL CONTROL



DUALTOP 100 STANDARD WALL CONTROL

WBRHA-101
DUALTOP
COMBI BLOWN
AIR & WATER
HEATER

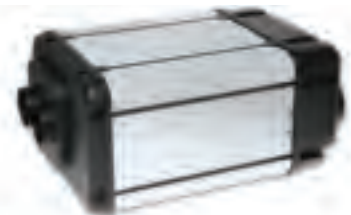

MUST BE INSTALLED BY A WEBASTO QUALIFIED FITTER

WE NOW OFFER INSTALLATION AND REPAIR SERVICE BY SupremeTech.co.uk




0844 414 2324



0844 414 2425

MINI XT & CARAVAN BOILERS



Introducing the CAK Mini Boiler XT® water heater--the intelligent way to deliver more hot water.

This water heater provides the equivalent of 9 litres of hot water in a 6 litre size by heating cold water to a hotter temperature and then mixing it with more cold water through an already installed thermostatic mixing valve on the rear. The result is 50% more hot water! & compact dimensions for easier installation.

NEW MINI 6XT & 10XT H₂O T WATER HEATERS

Our New XT® Mini Boilers have been developed using eXothermal Technology and the principles of heat exchange to provide an electric water heater delivers 50% more hot water than standard water heaters without an increase in size or weight! XT® Mini Boilers are of a high quality construction with 100% copper water tank, for long term reliability and integrity. The XT® Mini Boilers come with a fully insulated outer case for efficiency enabling the boiler to retain heat for up to 24 hours. Powered by a 230-volt mains electric element of 500 or 750 watts, the Mini 6XT & 10XT will provide sufficient water for even the larger installations. Operating pressure 16-30 psi (1-2 bar), built in 2.5 BAR pressure relief safety valve, Adjustable thermostat set to 80°C max. Adjustable thermostatic mixer valve for water temperature outputs of 45°C to 65°C. Water connections for 15mm push fit, for PVC plumbing use NC448 15mm to 12mm straight reducing barbed connector.

MINI605XT MINI 6XT H2OT WATER HEATER 6 LITRE MAINS 500 WATT

Ultra Compact size of 440mm (17 1/4") long (Inc electric & water connections), 240mm (9 1/2") wide, 235mm (9 1/4") high. Water tank capacity 6 litre. Hot water production capacity 9 Litres approx. Dry weight 5.7kg

MINI1007XT MINI 10XT H2OT WATER HEATER 10 LITRE MAINS 750 WATT

Compact size of 575mm (22 5/8") long (Inc electric & water connections), 240mm (9 1/2") wide, 245mm (9 7/8") high. Water tank capacity 10 litre. Hot water production capacity 15 Litres approx. Dry weight 6.7kg

NEW HEAT EXCHANGER VERSIONS OF MINI 6XT & 10XT WATER HEATERS

New version of water heater with the addition of copper heating coil (Calorifier coil) to connect heat source such as Webasto, Eberspacher or cooling water circuit of engine to provide hot water.

MINI605HE MINI 6XT H2OT WATER HEATER 6 LITRE WITH HEAT EXCHANGER MAINS 750 WATT

MINI1007HE MINI 10XT H2OT WATER HEATER 10 LITRE WITH HEAT EXCHANGER & MAINS 750 WATT ELEMENT

MINI1010HE MINI 10XT H2OT WATER HEATER 10 LITRE WITH HEAT EXCHANGER & MAINS 1000 WATT ELEMENT

CARAVAN BOILER

The C.A.K. Tanks Caravan boiler is manufactured in four 22 litre and three 12 litre horizontal cylinder models with element sizes of 500, 800 and 1200 watts. The caravan boilers come as standard with an adjustable thermostat and a choice of mains electric element sizes of 500, 800 and 1200 watts. The energy efficient design and construction of the Caravan boilers enables quick heat up rates to provide a highly effective source of stored hot water to your pumped domestic water system. The larger 22 litre capacity provides a significant quantity stored water available on tap, the boilers are very simple to install requiring only electrical wiring, positioning and connecting to water system. No need to plumb in a gas system for hot water.

All Caravan models provide high levels of performance and efficiency and are equipped with the following additional standard features,

- Glass lined steel tank for strength & very long life.
- Strong stainless steel mounting saddle and brackets.
- Pressure release safety valve (4 bar + - 1).
- Magnesium anode protects boiler from galvanic currents.
- Boilers tested to 8 (bar) 200 % of operating pressure to ensure safety and product quality.
- High quality outer casing to protect thermally efficient polyurethane insulation jacket.
- Boiler element voltage 230 240 volt 50 hz. (22 litre model also available 110 Volt)

Due to the closed cell polyurethane foam insulation and outer casing the water temperature losses will be less than 1°C per hour. This enables water to be stored and remain warm for a longer period.

- 1, Cold water in 1/2" BSP male 2, Domestic hot water out 1/2" BSP male

| PRODUCT SPECIFICATIONS BOILER MODEL | CARAVAN BOILERS | | | | | | |
|--|-----------------|--------|--------|--------|--------|--------|--------|
| | CB1205 | CB1208 | CB1212 | CB2205 | CB2208 | CB2212 | CB2211 |
| HEAT EXCHANGER | NO | NO | NO | NO | NO | NO | NO |
| MAINS ELEMENT WATTS | 500W | 800W | 1200W | 500W | 800W | 1200W | 1200W |
| VOLTAGE | 230V | 230V | 230V | 230V | 230V | 230V | 110V |
| WATER CAPACITY LTR | 12 | 12 | 12 | 22 | 22 | 22 | 22 |
| WEIGHT KG | 10 | 10 | 10 | 13 | 13 | 13 | 13 |
| MAX LENGTH L1 (mm) | 395 | 395 | 395 | 475 | 475 | 475 | 475 |
| CASING LENGTH L2 (mm) | 250 | 250 | 250 | 400 | 400 | 400 | 400 |
| FIXING CENTRES L3 (mm) | 175 | 175 | 175 | 300 | 300 | 300 | 300 |

THERMOSTATIC MIXER VALVE FOR NAUTIC AND CARAVAN BOILERS

Our new Thermostatic mixer valve kit is manufactured in plated brass. Suitable for installation directly to the boiler with hose and connectors. The Mixer valve automatically adds cold water to the hot water being drawn from your water heater to prevent scalding water arriving at your tap. Those at greatest risk of scald injury include children, disabled and diabetics.


Temperature Settings – To prevent scalding, regardless of the water heating method or the control devices used; the temperature of the hot water supplied to taps and showers should be controlled in the range of 43°C – 60°C (110°F - 140°F) with fail-safe set at 82°C (180°F). **CAUTION:** Ideally the temperature should be set at 46°C (115°F) for health and safety reasons, higher settings will increase the risk of scald injury. Those at greatest risk of scald injury include children, disabled and diabetics.

- BBTMIXV THERMOSTATIC MIXER VALVE FOR NAUTIC AND CARAVAN BOILERS 3/8" BSP
BBTMIXV12 THERMOSTATIC MIXER VALVE FOR NAUTIC AND CARAVAN BOILERS 1/2" BSP

Ever wish you could have more hot water but didn't want a bigger, bulkier, heavier water heater? Now you can...



eXothermal Technology



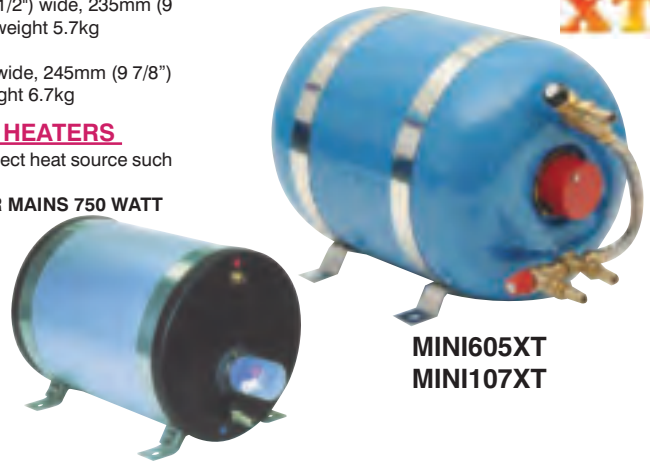


MINI605XT
MINI107XT


CARAVAN BOILER CB2212



CARAVAN CB12

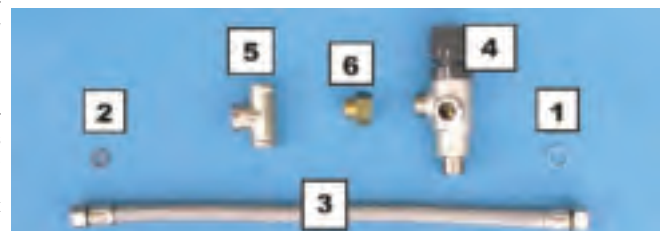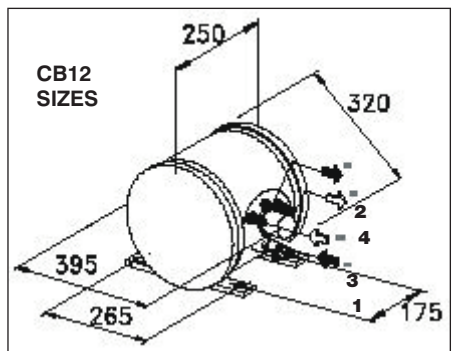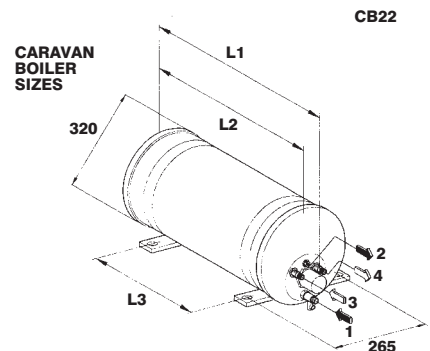

WE NOW OFFER INSTALLATION SERVICE IN KENILWORTH BY SupremeTech.co.uk



WHALE WATER & SPACE HEATERS



Whale Gas & Electric Storage Water Heater

- Choice of settings – Fast heat up or low current draw
- One piece flue – No cover required
- Robust Insulation – Meets grade III EN1645-1
- 3 year Warranty

Simple to use On/Off switch control functions – One model – 5 settings Gas only - Electric low setting (WWH1302 600W/2.6A) (WWH0802 750W/3.25A) - Electric high setting (WWH1302 1200W/5.2A) (WWH0802 1500W/6.5A) - Gas and electric low - Gas and electric high.

| Heat up times | Model | WWH1302 | WWH0802 |
|-------------------|--------------------------|---------|---------|
| Approximate times | Gas Operation | 43 mins | 26 mins |
| from 15oC to 70oC | Electric Operation | 38 mins | 20 mins |
| | Gas & Electric Operation | 22 mins | 12 mins |

Minimal Wiring – 3 pin plug - Simply plug in so no 230V wiring required.

One Control Panel - Includes easy to mount simple to use control panel. One 3.5m cable with simple connectors,

Quick Connect Plumbing - 12 mm Quick Connect Pre-assembled plumbing with adaptors for other pipework systems included.

Maintenance - Diagnostics system for easy fault finding and easily accessible components for servicing.



WWH1302



WWH0802 DIMENSIONS



WWH1302 DIMENSIONS

High Capacity - HOT WATER FOR LONGER

- Large 13L capacity hot water tank – more hot water
- Board Mounted Mounted on a board for quick and easy installation. The raised position allows pipes and wires to be housed underneath the heater for neat and compact installation

WWH1302 WHALE 13L HIGH CAPACITY WATER HEATER GE
WWHAD2 CARVER FLUE PLATE ADAPTOR


NEW Rapid Heat – COMPACT DESIGN, FAST HEAT UP TIMES

- Compact 8L capacity hot water tank – compact design saves space

WWH0802 WHALE 8L RAPID HEAT WATER HEATER GE
Including adaptor plate



WWH0802

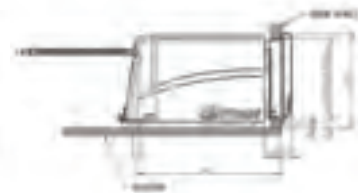

NEW WHALE GAS & ELECTRIC SPACE HEATER

For Internal or Underfloor installation

Frost protection setting – To protect your caravan / motorhome in cold weather conditions

Compact design – Frees up valuable storage space – versatile and lightweight weighs only 6.3kg.

Simple to use control panel – 3.5M cable for mounting flexibility - Electronic temperature control – Electric settings 500W/1000W/2000W – Gas setting – Circulation fan setting.

Energy efficient design - requires only 2kW Gas or 2kW electric

Full range of stylish & practical vents and Ducting fittings

Flue mounting flexibility – Available in various lengths, 0.75m WFK2075, 1.25m WFK2125 & 2.00m WFK2200.

Minimal Wiring – 3 pin plug - Simply plug in so no 230V wiring required.

WSH2002 WHALE GAS & ELECTRIC SPACE HEATER

WSH2012 UNDERFLOOR WHALE GAS & ELECTRIC SPACE HEATER

WFK2075 0.75m FLUE PIPE

WFK2125 1.25m FLUE PIPE

WFK2200 2.00m FLUE PIPE

WDX6501 END BLANK CAP FITTING


WDX6502 STRAIGHT FITTING

WDX6503 TEE FITTING


WDX6504 Y FITTING

WDX6511 DIRECTIONAL CLOSEABLE OUTLET FITTING


WDX6516 FIXED OPEN OUTLET FITTING

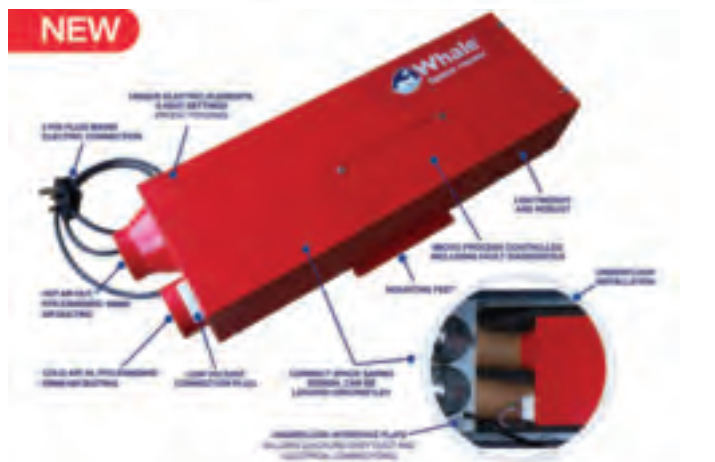

NEW

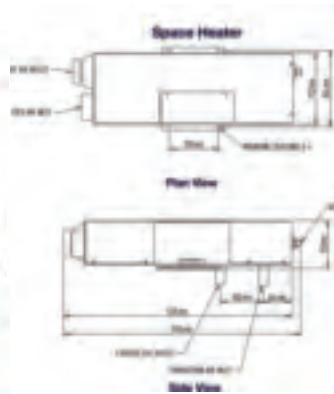

Dimensions

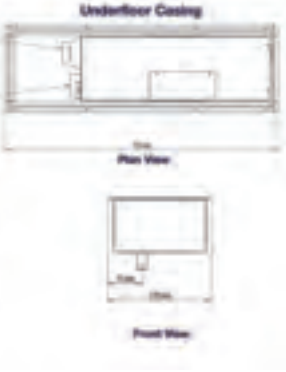


WE NOW OFFER INSTALLATION AND REPAIR SERVICE BY SupremeTech.co.uk



0844 414 2324



0844 414 2425



HEATSOURCE BLOWN AIR CLIMATE CONTROL



Heating

The Heatsource 2000 & 2800 are automatic, thermostatically controlled blown air heating systems fuelled by Propane or Butane gas. Heatsource is designed for a variety of automotive and marine applications as a source of heat totally independent of the engine.

Combustion is of the forced air type, using a fan to draw air from the outside. This is then passed into the combustion chamber, where it mixes with gas and is automatically ignited by a spark. Gas is switched electronically with a solenoid valve, the flow controlled by a jet and the spark supplied by a high voltage ignitor housed within the heater. **Optional Digital timer available.**

Due to the design and efficiency of the stainless steel burner and heat exchanger, output is high, combustion is clean and all waste products are exhausted externally. Cabin air is usually re-circulated and drawn via the main fan, passed over the three surfaces of the heat exchanger and blown into the cabin through ducting and hot air outlets. Cabin air is totally sealed from exhaust gases. The unit is a room-sealed appliance and operates on propane or butane gas. Comprehensive installation kits supplied with each heater are listed below. Marine kits include combined inlet & exhaust through hull skin fitting.

Compact size high output heater.

One of the quietest combustion heaters in production.

Designed for reliable, maintenance free operation.

Fast warm up time.

Airflow sensing detects blocked or restricted flue pipes.

Self-diagnostic fault finding with LED indication.

| ECONOMY | Heatsource 2000 | Heatsource 2800 |
|----------------------------|------------------|------------------|
| Average consumption | 140 grams / hour | 225 grams / hour |
| Calor 3.9 kg Propane | 28.0 hours | 17.5 hours |
| Calor 4.5 kg Butane | 32.0 hours | 20.0 hours |
| Calor 7 kg Butane | 50.0 hours | 31 hours |
| Calor 6 kg Propane | 42.5 hours | 26.5 hours |
| Calor 13 kg Propane | 93.0 hours | 58.0 hours |
| Calor 15. kg Butane | 107.0 hours | 67 hours |
| Camping Gaz 2.72 kg Butane | 19.5 hours | 12 hours |

PROPEX HEATSOURCE GAS BLOWN AIR HEATERS 2.0 & 2.8 kW

Blown air heaters offering 2.0 kW output running on 12 volt consume only 1.4 amps continuous running, gas usage only 140 grams per hour. Airflow 55 CFM. The 2.8 kW heaters running on 12 volt consume only 1.9 amps continuous and has gas usage of 225 grams per hour. **The 2.8kW heater is 420mm long x 210mm wide x 120mm high. Air throughput is 85 CFM.**

HEATSOURCE ONE OUTLET KIT CONTENTS

Heatsource 2000w or 2800w heater - Thermostatic wall control with harness. - DC power harness. - 1 x Hot air outlet directional. - 1 m of Hot air ducting - 1 x Recirculation air vent - 0.2m Combustion air pipe. - 1m of Heater exhaust pipe. - 1 kit of fastenings.

| | |
|---------|-------------------------------------|
| PX20112 | PROPEX 2000 ONE OUTLET KIT 12 VOLTS |
| PX20124 | PROPEX 2000 ONE OUTLET KIT 24 VOLTS |
| PX28112 | PROPEX 2800 ONE OUTLET KIT 12 VOLTS |
| PX28124 | PROPEX 2800 ONE OUTLET KIT 24 VOLTS |

HEATSOURCE 2 OUTLET KIT CONTENTS

Heatsource 2000w or 2800w heater - Thermostatic wall control with harness - DC power harness - 1 x Hot air outlet directional - 2 m Hot air ducting - 1 x open close air vent - 1 x Y piece - 1 x Recirculation air vent - 0.2m Combustion air pipe - 1m Heater exhaust pipe - 1 kit of fastenings.

| | |
|---------|--------------------------------------|
| PX20212 | PROPEX 2000 TWO OUTLETS KIT 12 VOLTS |
| PX28212 | PROPEX 2800 TWO OUTLETS KIT 12 VOLTS |

MARINE KIT CONTENTS

The kit contents are the same as PX20112/212 and PX28112/212 with the addition of a combined stainless steel marine combustion air inlet & exhaust thru hull skin fitting. Also increase to 1 m of combustion air pipe.

| | |
|----------|---|
| PX20112M | PROPEX 2000 MARINE ONE OUTLET KIT 12 VOLTS |
| PX20212M | PROPEX 2000 MARINE TWO OUTLETS KIT 12 VOLTS |
| PX28112M | PROPEX 2800 MARINE ONE OUTLET KIT 12 VOLTS |
| PX28212M | PROPEX 2800 MARINE TWO OUTLETS KIT 12 VOLTS |



SPARE PARTS

| | |
|------------|--|
| PXSOCLOUT | PROPEX OPEN / CLOSEABLE DIRECTIONAL AIR VENT |
| PXSOUT | PROPEX OPEN LOUVRED AIR VENT |
| PXS80Y | PROPEX 80MM Y BRANCHE (REQUIRES REDUCERS) |
| PXS8060RED | PROPEX 80MM TO 60MM REDUCER |
| PXS60DUCT | PROPEX 60MM BLOWN AIR DUCT PER METRE |

NEW PROPEX HEATSOURCE GAS & ELECTRIC AIR HEATERS

2.0Kw gas fired heater with the addition of a variable mains element with efficient heat exchanger built in. Three settings are available giving 500W, 1 KW or 2 KW of heat output and drawing a maximum current of 9 Amps. The motor speed is altered to suit each power level to ensure maximum efficiency or, when on low 500w setting keeping motor and air noise to a minimum for night time running.

| | |
|-----------|--|
| PX20112GE | PROPEX 2000E GAS ELECTRIC ONE OUTLET KIT |
| PX20212GE | PROPEX 2000E GAS ELECTRIC TWO OUTLET KIT |

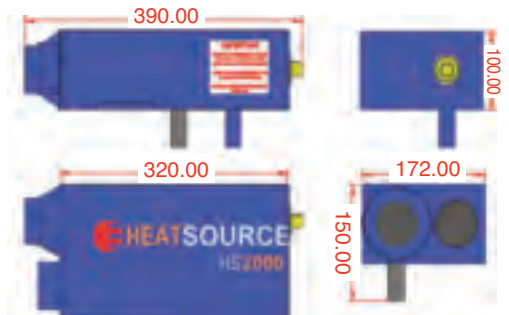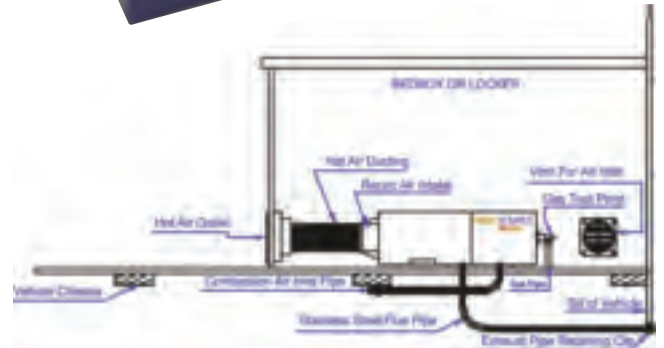

MARINE FLUE



PXF0CLOUT



PXFOUT



HEAT SOURCE GAS AND BLOWN AIR HEATER

WE NOW OFFER INSTALLATION SERVICE IN KENILWORTH BY SupremeTech.co.uk



0844 414 2324



0844 414 2425



The Truma range of equipment will be found installed in many UK and Continental motorhomes.

TRUMATIC S3002/ TRUMATIC S3002P

The Trumatic S3002 is available in manual Piezo ignition or with battery auto ignition models. It has many features: Built-in thermostat, Warm air is evenly distributed, Front case (order separately) available in Sepia Brown or Agate Grey, Economic gas consumption (approx 95% efficiency), Exhaust ducts through the roof (Roof Flue kit available as an optional extra), Rated thermal output: 3400 W, Gas Consumption: 30-280g/h, Front casing: Height from floor 505mm Width 500mm Depth 95mm, Rear installation box: Height 480mm depth 122mm, Weight: 9.8kg

Front case and roof flue kit must be ordered separately. They are optional extras.

TR3131101 Trumatic S3002 with Automatic Ignitor, thermostat and installation box

TR3129101 Trumatic S3002P with Piezo Ignitor, thermostat and installation box

TR3004050200 Front case Agate Grey for S3002

TR3004050100 Front case Sepia Brown for S3002

TR3033000 Roof flue Kit comprises: Roof Flue AK3, 2.5m exhaust duct, 2m insulating duct & 3 clips.

ULTRAHEAT UPGRADE

The Ultraheat upgrade provides the addition of 230v heating to your Trumatic S3002 gas heater. Three power settings (500W, 1000W & 2000W) for a level of heat that's just right for you, More efficient warm air distribution than with simple standing fan heaters, Heats up incredibly fast, whatever the weather, Simple installation - fits between the installation box and heat exchanger, Complete with thermostat, control panel and 3m connection cable, Weight: 2kg.

TR3040202 Ultraheat kit

TRUMATIC S2200

The compact Trumatic S2200 is available with the option of a 1.5 V auto igniter (Trumatic S 2200) or piezo igniter (Trumatic S 2200 P), current-free operation without installing optional fan, Heater available with exhaust duct connection on the left (standard) or right (on request), Exhaust duct through roof or wall cowl, Option of drawing in combustion air via the side wall (e.g. for use in containers or summer houses) Warm air is evenly distributed from 1850w output, Flexible installation thanks to compact dimensions. Economical gas consumption (approx. 95% efficiency).

TRS2200P Trumatic S2200 piezo

TRS2200 Trumatic S2200 auto ignition

TRUMA COMBI GAS-ELECTRIC

The Combi range provides combined water and air heating in a one box installation. Available in two models 4KW or 6KW providing large capacity units that can be used for blown air heating independently or for both heat and hot water at the same time. Features: Compact installation, 10 Litre water heating capacity in stainless tank, Integral fan for blown warm air, During winter operation, the vehicle is heated and the water is warmed up at the same time; during summer operation, only the water is warmed up, The heater can be operated even if the boiler hasn't been filled, Four warm air connections ensure optimum air distribution via a quiet yet powerful fan, The temperature can be infinitely adjusted on the ergonomic control panel, The current-free Frost Control safety/drain valve empties the boiler automatically if there is a risk of frost. 3m heater control panel cable, extensions available as extras. Heater is 12volt. Rear External Flue. Minimum installation dimensions. (L front to rear x W x H) 540 x 500 x 350 mm. **Requires exhaust flue ducting kit CW purchased separately.**

TRCOMBI4E 4kw Air and water heater with gas & 230v 1800w electric operation 33710-01

TRCOMBI6E 6kw Air and water heater with gas & 230v 1800w electric operation 33810-01

TRUMA COMBI DIESEL

The efficient diesel version with burner technology from Eberspächer similar heat up times and dimensions to the gas version.

Requires Wall cowl WKCD and pipe set CDW purchased separately.

TRCOMBI6D 6kw Air and water heater with diesel burner 33500-01

TRUMA ELECTROBOILER

Straightforward, fast installation, Full 14-litre capacity, Stainless steel container for ideal drinking water quality, Short heating times, High-performance 230v heating element with 850 W output. Lightweight - just 3 kg. 10mm water hose connections. Incl. control panel with 3 m cable & safety/drain valve. Heat up time 70min approx. Space required for installation: 45 cm diameter, 29.5 cm height

TRELECTROB 14 Litre Electroboiler 230v 850w 71200-01

TRUMA THERME

Efficient use of heat from the hot air heating system & 230V heating element for a constant supply of hot water even if the heating is not switched on, Short heating times - in 230v 300w electrical operation - from 15°C to 60°C in 50 minutes, Water temperature infinitely variable up to 65°C, 5 litre capacity., Lightweight (just 2 kg) and compact. Incl. control panel, drain and breather valves.

TRTHRM TT2 Truma Therme TT-2 (230V 300W 5 Litre)

TRUMA ULTRASTORE BOILER B10 / B14

10 or 14 litre capacity in accordance with requirements, Fast water heating with powerful 1500 W gas burner, Absolute independence whilst on the move, Low gas consumption saves money, Space-saving design, Also available with an electrical heating element (850 W), Very short heating time (just 25 minutes in mixed operation), Stainless steel container for ideal drinking water quality.

TRUTSB10 Ultrastore B10 gas only 73000-01

TRUTSB10EL Ultrastore B10 gas & electric 73400-21

TRUTSB14 Ultrastore B14 gas only 73010-01

TRUTSB14EL Ultrastore B14 gas & electric 73410-21

TRUMA SPARES the full range of Truma ultraflow water connections, plug in pumps, waterlines and filters are available. As well as a full range of spare parts for the heating systems including cowls and ducting.



TRUMA S3002



TRUMA ULTRAHEAT



TRUMA S2200



TRUMA COMBI 4 & 6 E



TRUMA COMBI D



TRUMA ELECTROBOILER



TRUMA THERME TT-2




TRUMA ULTRASTORE



IMPORTANT NOTE: ALL GAS APPLIANCES MUST BE INSTALLED BY A QUALIFIED GAS ENGINEER. IF APPLIANCE IS DIY INSTALLED THE GAS INSTALLATION MUST BE INSPECTED FOR SAFETY BY A COMPETENT PERSON BEFORE USE.

WE NOW OFFER INSTALLATION, GAS SAFETY TEST AND REPAIR SERVICE BY SupremeTech.co.uk



AIR HEATERS ELECTRIC, TRUMA FANS & BLOWN AIR DUCTING



Heating

PORTABLE LOW WATTAGE ELECTRIC CONVECTION HEATER

IGLOO 500 HEATER

This compact 500w electric convection heater is ideal for heating leisure vehicles while on 240v hook-up, or low heat while unit is in winter storage. It is also useful as a conservatory, greenhouse, summer house, site hut, aviary or garage heater. Heater is supplied with wall mounting bracket, and is easily unhooked to be stored away for extra space in the summer. It is of compact size with built in thermostatic control. Must be fixed to a wall. Not to be used as a free-standing heater.

SIZES: HEIGHT 380mm, WIDTH 160mm, and DEPTH 110mm.

EHIGLOO IGLOO 500W 230V CONVECTOR SPACE HEATER.



BLOWN AIR FANS

Simply fitted to most convection heaters, they are designed to supplement the convection heating process by directing heat to colder areas to equalise the heating effectiveness. Set up the blown air system by using a mix of the below connectors and outlets to suit the need of your particular installation.

TEB2 TRUMA TEB 12 VOLT FAN WITH REMOTE WALL CONTROL

TEB2S35 TRUMA TEB 12 VOLT FAN FOR TRUMATIC S3002 S5002

TRUMA AWNING KIT


New kit to allow easy provision of warm air into the awning. Complete with exterior terminal ducting, connectors and remote shut off.

G-AWNKIT TRUMA AWNING KIT BLOWN AIR EXTENSION KIT

BLOWN AIR DUCTING AND FITTINGS.

The industry standard ducting and fittings used on most installations. The Truma blown air fittings will inter change with the older Carver system in all cases. The range of fittings allows simple installation of extensions to existing systems or the addition of a new system with a Truma TEB2 fan and a range of duct and fittings. The new design fittings are all grey behind the fascia apart from air outlets where there is a choice of colour.

- G-BT** BT SIDE OUTLET (REQUIRES EN AIR OUTLET)
- G-DR** DR WATERPROOF OVERDUCT / MTR
- G-EN** EN STRAIGHT AIR OUTLET BEIGE
- G-ENG** EN STRAIGHT AIR OUTLET LIGHT GREY
- G-ENW** EN STRAIGHT AIR OUTLET WHITE
- G-EM** EM NUT FOR EN TO MAKE END OUTLET
- G-SP** BRANCH PIPE SHUT OFF VALVE
- G-SP2** BRANCH PIPE BOWDEN CABLE SHUT OFF VALVE
- G-UM** UM STRAIGHT CONNECTOR FOR UR DUCT
- G-UR** UR DUCTING 65mm OD / MTR
- G-US** US CLIPS FOR UR DUCTING
- G-UT** UT TEE PIECE FOR UR DUCT
- G-VD** VD BLANKING PLUG
- G-WL** WL WALL VENTILATOR
- G-Y** Y PIECE FOR UR DUCTING

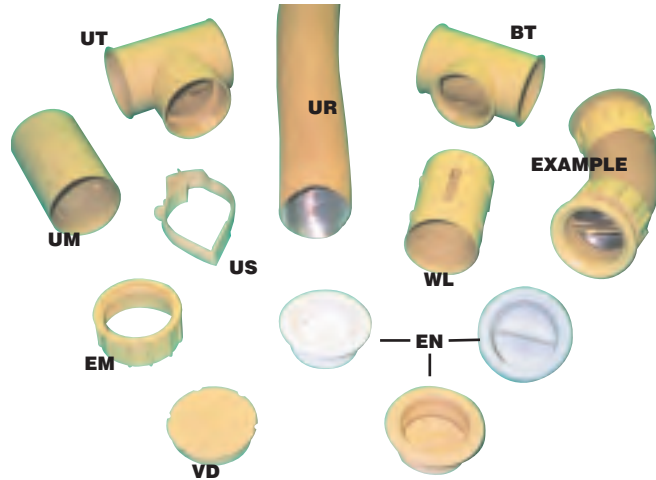

ELHPTC30012 12VOLT 300W CERAMIC HEATER



AUXILIARY BLOWN AIR HEATERS

Link into webasto thermosystems for blown air heat output, or recover waste heat from the engine's cooling system via the units highly efficient heat exchanger. To provide just the right amount of blown air warmth to the cabin some units have a 3 speed fan. Ideal for inland boats, A class conversions for window demist, minibuses, PSV's, campers, special vehicle cabs and kit cars. When matched up with a thermal source such as a Webasto Thermo Top C diesel heater they provide blown air heating wherever required.

COMPACT REMOTE AUXILIARY BLOWN AIR HEATERS

The heat exchanger is made from copper with aluminium radial fins, moulded ABS outer casing and tough ABS motor casing. The 'R' heaters have provision for 60mm hose duct outlets, to suit ur duct and matching ducting fittings. 'RP' have adjustable diffusers in fascia panel.

260 models 12V / 5 A, heat output 3.5 kW, air flow 170 m3 / hour.

AXSR260 SIROCCO 260 HEATER FOR 2 X UR DUCT CONNECTIONS
AXSRP261 SIROCCO 261 HEATER & BUILT IN FASCIA 400mm X 180mm COMES WITH FAN SWITCH, WATER TEMPERATURE VALVE CONTROL & 2 DIRECTIONAL AIR DIFFUSERS.

AXSRP263 SIROCCO 263 HEATER WITH 2 AIR DIFFUSER OUTLETS
AXSRP265 SIROCCO 265 HEATER & SMALLER BUILT IN FASCIA WITH HEAT LEVEL & 3 SPEED FAN CONTROLS AND FIXED AIR DIFFUSER 269mm X 198 mm.

AXSRSW 3 POSITION FAN SPEED ROTARY SELECTOR SWITCH.
AXS271 WCV WATER FLOW VALVE TO ADJUST TEMPERATURE
AXS273 5/8" (16 mm) HEATER HOSE REINFORCED RUBBER HOSE PER MTR
AXS274 5/8" (16 mm) metal T PIECE FOR SYSTEM CONNECTION



WE NOW OFFER INSTALLATION SERVICE BY SupremeTech.co.uk



0844 414 2324



0844 414 2425