



**C.A.K. QUALITY NON TOXIC WATER HOSES**  
**H6CRF** 3/8" (10mm) COLD BLACK REINFORCED  
**H6H** 3/8" (10mm) HOT RED REINFORCED  
**H1CRF** 1/2" (12mm) BLACK REINFORCED COLD  
**H1H** 1/2" (12mm) RED REINFORCED HOT  
**H3RF** 3/4" (20mm) BLACK REINFORCED  
**H2RF** 1" (25mm) BLACK REINFORCED




**C.A.K. SUPAFLEX HOSE**  
 With integral helicoil to prevent deformation When bending around tight corners. Smooth bore (no clog if used for waste) NOW GREY OR BLUE  
**H3SG** 3/4" (20mm) SUPAFLEX GREY HOSE  
**H2SB** 1" (25mm) BLUE **H2SG** 1" (25mm) GREY  
**H5S** 1 1/2" (38mm) SUPAFLEX HOSE  
**H4SB** 40mm BLUE **H4SG** 40mm GREY  
**H7S** 3" (76mm) SUPAFLEX GREY DISCHARGE



**HOSE CLIPS A2 STAINLESS BAND**  
**HC6** 3/8" Hose clip Stainless size 8-16mm  
**HC1** 1/2" Hose clip Stainless size 12-22mm  
**HC2** 1" Hose clip Stainless size 20-35mm  
**HC3** 3/4" Hose clip Stainless size 20-32mm  
**HC4** 40mm & 1 1/2" Clip Stainless size 32-50mm  
**HC7** 3" Hose clip Aluzinc (for 3" Discharge hose)




**NYLON SNAP HOSE CLIPS**  
 (FOR UNDERWATER USE)  
**HBG** SIZE G 1/2"  
**HBH** SIZE H 1/2"  
**HBN** SIZE N 3/4"  
**HBT** SIZE T




**NUT IN TANK FITTINGS**  
**NIFCVD040** 40mm 45 Degree  
**NIFELB010** 3/8" (10mm) Elbow  
**NIFELB050** 1/2" (12mm) Elbow  
**NIFELB075** 3/4" (20mm) Elbow  
**NIFELB100** 1" (25mm) Elbow  
**NIFELB040** 40mm Elbow  
**NIFSTR010** 3/8" (10mm) Straight  
**NIFSTR050** 1/2" (12mm) Straight  
**NIFSTR075** 3/4" (20mm) Straight  
**NIFSTR100** 1" (25mm) Straight  
**NIFSTR040** 40mm Straight



**HOSE CONNECTORS BARBED PLASTIC** Use these connectors to join flexible hose  
 Hose adaptors join 2 different sizes of hose  
**HCON1012** 3/8" to 1/2" (10mm - 12mm)  
**HCON1520** 1/2" to 3/4" (15mm - 20mm)  
**HCON2025** 3/4" to 1" (20mm - 25mm)  
**Elbow Hose Connector**  
**HELB038** 3/8" (10mm) Elbow  
**HELB050** 1/2" (12mm) Elbow  
**HELB100** 1" (25mm) Elbow  
**Y piece hose connector**  
**HY038** 3/8" (10mm) Y piece  
**HY050** 1/2" (12mm) Y piece  
**HY075** 3/4" (20mm) Y piece  
**HY100** 1" (25mm) Y piece




Tees must have hose clips.  
**Straight hose connectors**  
**HSTRO38** 3/8" (10mm) Straight  
**HSTRO50** 1/2" (12mm) Straight  
**HSTRO75** 3/4" (20mm) Straight  
**HSTR100** 1" (25mm) Straight  
**Tee Hose Connectors**  
**HTEE038** 3/8" (10mm) Tee  
**HTEE050** 1/2" (12mm) Tee  
**HTEE075** 3/4" (20mm) Tee  
**HTEE100S** 1" (25mm) Tee




**P CLIPS**  
 P-clips are used to secure piping runs. They are fixed by one screw through fixing hole.  
**HPC1220** 5/16" (8 mm)  
**HPC1225** 5/8" (16 mm)  
**HPC1226** 3/4" (20 mm)  
**HPC1221** 7/8" (22 mm)  
**HPC1228** 1" (25 mm)  
**HPC1252** 1 3/8" (35 mm)  
**WD1250** 1 3/16" (30 mm)  
**WD1255** 1 1/8" (28 mm)



**CAK BSP TAPER THREADED HOSE BARB CONNECTORS (M = Male, F = Female BSP thread)**  
**STR3812** 3/8" BSP M X 1/2" (12 mm) Straight  
**ELB3812** 3/8" BSP M X 1/2" (12 mm) Elbow  
**STR5012** 1/2" BSP M X 1/2" (12 mm) Straight  
**ELB5012** 1/2" BSP M X 1/2" (12 mm) Elbow  
**BRF3812** 3/8" BSP F X 1/2" (12 mm) Straight brass  
**BRF5012** 1/2" BSP F X 1/2" (12 mm) Straight brass  
**BRM3812** 3/8" BSP M X 1/2" (12 mm) Straight brass  
**BRM5012** 1/2" BSP M X 1/2" (12 mm) Straight brass



**THREADED HOSE JOINTERS**  
 Nylon fitting barbed both ends.  
 Allows easy connection or extension of two hoses.  
**HFTJ020** 3/4" (20 mm)  
**HFTJ025** 1" (25 mm)  
**HFTJ040** 40 mm Hose



**FLOOR SEAL HOLE TIDIES**  
 Seals around pipes or wires where they go through the floor to reduce draughts, insect or water ingress.  
**HFS1091** For 5 to 11mm Dia.  
**HFS1092** For 10 to 19mm Dia.  
**HFS1093** For 19 to 28mm Dia.



**MINI METAL BALL VALVES**  
 Mini valves female threaded for isolating water systems.  
**DTILF038** MINI METAL BALL VALVE 3/8" BSP  
**DTILF050** MINI METAL BALL VALVE 1/2" BSP



**NUT IN BULKHEAD FITTING**  
 (Hose connection each end)  
**NIFTBS050** 10 / 12mm Straight  
**NIFTBA050** 10 / 12mm Elbow



**TANK DRAIN TAP 1" (25 mm) hose**  
**DTB** Drain tap blue fresh.  
**DTG** Drain tap grey waste.  
**DTN** Drain tap back nut.  
**DTW** Drain tap washer



**INLINE DRAIN TAPS**  
 (Low less than 16 psi & non pressurised)  
**DTIL1** 10mm Inline tap  
**DTIL2** 1/2" Inline tap  
**DTIL3** 3/4" Inline tap  
**DTIL3C** 3/4" Waste Inline tap  
**DTIL4C** 1" Waste Inline tap



**NUT IN DRAIN TAP**  
**DTN2** Drain tap nut in 16mm for 13mm ( 1/2" ) PVC hose 1/2" BSP nut




**TAP SPRING CLIP**  
**HTC062** 5/8" Zinc plated  
**HTC125** 1.25" Zinc plated  
**HTC125B** 1.25" Black nylon coat



**CAK INLINE STRAINER + TRAP**  
**CAK-WF1** Fine inline filter to suit 10mm & 12mm hose. Easily unscrews for cleaning  
**CAK-WF1SF** Spare mesh strainer



**HOSE SOCKETS**  
**HSKT075** 3/4" Hose socket  
**HSKT050** 1/2" Hose socket



**BAYONET QUICK CONNECTORS**  
 3/4" quickly adds extension hose to SDT099 supadrain tap above. 1" suits larger taps as used by Swift and German vans  
**HFQBH075** 3/4" Hose barb brass (D)  
**HFQBT075** 3/4" BSP thread brass (C)  
**HFQBH100** 1" Hose barb brass (D)  
**HFQBT100** 1" BSP thread brass (C)  
**HFQBCAP** Closure cap brass

WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)



# PUSH FIT PLUMBING



## SPEEDFIT FRESH WATER PUSH FIT PLUMBING SYSTEM

Speedfit push fit plumbing range for easy installation of fresh, hot and cold water system. Not suitable for use with fuel. Pipe simply pushes home into fitting for a perfect first time seal. Speedfit will grip most 12 & 15mm pipes be they plastic, stainless or copper. Stainless teeth in the collits grip onto these soft or hard surface pipes, so long as they are within diameter size tolerances. Whole systems can be assembled for a clean neat installation. Fittings can be dismounted by pushing back collet and withdrawing pipe. The joint can be broken and re-made as many times as you wish, they will reseal when you push the pipe back in. Whole quick-connect 12 & 15 fittings also available to adapt existing systems. Whale fittings will not hold onto copper or hard polished surface plastic fittings, unless they have 2 circumferencial grooves. For these applications a Speedfit fitting must be used.




Pipe connection has never been easier than with push fit fittings. NOTE: Fittings and pipe should be kept clean, bagged and undamaged before use. Scratches and cuts to outer pipe surface can prevent 'O'ring from sealing on to it causing system leaks.

Cut the pipe square ensuring it is free of score marks. We recommend you use the JGTC pipe cutters for best results.

To avoid damage to the 'O' Ring, make sure burrs and sharp edges are removed. **DO NOT** use a Hacksaw. The burrs will prevent the fitting from sealing correctly.

With the fitting clean and undamaged and the pipe cut square, you are now ready to make the connection

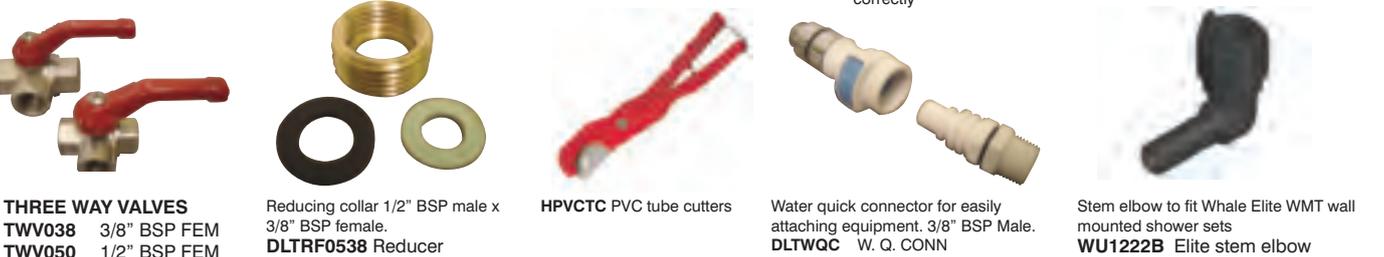

**WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



0844 414 2324



0844 414 2425



## 25 / 28 MM EASY FLOW PUSH FIT WASTE PIPE SYSTEM

Larger bore easy flow push fit waste water piping system for Motorhomes & Caravans, easily fitted by simply pushing the rigid pipe and fittings together. Much higher waste water flow rates from your sink and shower will make a significant improvement to the drain-ability of the kitchen sink. Supaflex smooth bore waste pipe mixes into the system to make installation in tight spots easier. You can switch between rigid and 25mm Supaflex as many times as necessary, by using **WD1322** & **WD1323** adaptors. **WD1323** can be put into any fitting including sinkwastes to go straight onto 25mm Supaflex for pipe runs, to change from 25mm Supaflex onto rigid pipe or the reverse use **WD1322**.

This range is suitable for most installations. Small panel van conversions should use 20 or 25 mm Supaflex, or a combination of 25mm supaflex hose below floor, to snake around obstructions on route to waste tank, with 28mm rigid used on the straighter runs. Larger systems can use any combination of the fittings, 28mm rigid and 25mm supaflex, to create the waste system.

**WD1320 28MM RIGID PIPE 3MTR LENGTHS (A) must be cut to 1.5m maximum to prevent excess carriage charges from the parcel carrier.**

## 25 / 28 MM EASY FLOW PUSH FIT WASTE PIPE SYSTEM

<b>H2SG</b>	25MM SUPAFLEX SMOOTH BORE WASTE HOSE (See page 24)
<b>WD1250</b>	1 3/16" P CLIP (SUIT 25MM SUPAFLEX) (See page 24)
<b>WD1255</b>	1 1/8" P CLIP (SUIT 28MM RIGID PIPE) (See page 24)
<b>WD1320</b>	28MM GREY PUSH FIT RIGID PIPE 3MTR LENGTHS (A)
<b>WD1300</b>	1 1/4" - 28MM ANGLED SINKWASTE S/S TOP CW PLUG (C)
<b>WD1304</b>	1 1/4" - 28MM 90 DEG SINK WASTE S/S TOP CW PLUG
<b>WD1306</b>	1 1/4" - 28MM STRAIGHT SINKWASTE S/S TOP CW PLUG (B)
<b>WD1319</b>	28MM THRU FLOOR ADAPTOR
<b>WD1321</b>	28MM PUSH FIT STRAIGHT CONNECTOR
<b>WD1322</b>	25MM SUPAFLEX HOSE - 28MM FEMALE SOCKET ADAPTOR (H)
<b>WD1323</b>	25MM SUPAFLEX HOSE - 28MM MALE PIPE ADAPTOR (J)
<b>WD1324</b>	28MM PUSH FIT STEM ELBOW (F)
<b>WD1325</b>	28MM PUSH FIT EQUAL ELBOW (G)
<b>WD1326</b>	28MM PUSH FIT 135 DEGREE CONNECTOR (E)
<b>WD1327</b>	28MM PUSH FIT TEE CONNECTOR (K)
<b>WD1328</b>	28MM PUSH FIT Y CONNECTOR (D)
<b>WD1330</b>	28MM OUTLET HOSE SOCKET
<b>WD1420G</b>	28MM NUT IN TANK FITTING STRAIGHT MALE
<b>WD1421</b>	28MM 1" BSP TANK FITTING STRAIGHT FEMALE
<b>WD1424</b>	20MM SUPAFLEX HOSE - 28MM MALE PIPE ADAPTOR
<b>WD8252</b>	PIPE SADDLE CLIP 28MM
<b>HY100</b>	Y PIECE FOR JOINING TWO WASTE OUTLET PIPES IN TO ONE WASTE CONTAINER (See page 24)

<b>WD8531G</b>	GREY MOUNTING BRACKET FOR 8532G GREY WASTE TAP
<b>WD8531B</b>	BLUE MOUNTING BRACKET FOR 8532G GREY WASTE TAP
<b>WD8532G</b>	GREY WASTE TAP 28MM
<b>WD8532B</b>	BLUE WATER TAP 28MM

**Most of above Range now available in Blue enquire for details.**

## 28 MM WASTE WATER INLINE SMELL TRAP

New larger smell trap to fit directly into 28mm rigid pipe. Lower bowl is removable at a twist to allow easy cleaning. The Trap can be fitted into 25mm Supaflex by using **WD1323** adaptor. To retrofit the trap into an existing 20mm (3/4") Supaflex waste pipe system use the new **WD1424** 20mm to 28mm adaptor.

**WD1425G** 28MM Waste water smell trap

## WASTE WATER INLINE SMELL TRAP NOW ALSO 25MM

An innovation for the waste water system. A simple but effective trap to prevent waste tank smells from permeating back up the waste pipe from the waste holding tank.

The Waste Water Trap **HGWT** is straight forward to fit. Simply cut into the vertical section of 1/2" waste pipe from the sink waste going to your waste tank fit the trap into the pipe with the screw holes uppermost. Secure the hoses with a little silicone sealant and hose clips. Now screw the trap to the nearest secure position to prevent it from movement. The trap is now fitted. From time to time you may need to remove the trap to backwash any large debris.

**HGWT** Waste water trap for 3/4" (20mm) waste hose

**HGWT25** Waste water trap for 1" (25mm) waste hose

## LARGE BORE NON RETURN VALVES FOR WASTE WATER

Large bore inline non-return valves to prevent waste water backing up into your shower tray, particularly when travelling up or down hills or when the waste tank is full.

Can also be used to maintain prime in a suction pipe, to a macerator pump etc. in marine applications. Available for 3/4" (20mm), 1" (25mm) & 1 1/2" (38mm) hose.

**WLV1215** 1" & 1 1/2" (25 - 38 mm) Non return valve. Length 125mm

**WLV1219** 3/4" (19 mm) Non return valve.

## NUT IN SKIN FITTINGS

Designed as an inside out version of our normal nut in tank fittings these skin fittings have the nut on the outside of the tank. Suitable for most above waterline outlets for marine use through hull or as a tank fitting.

The fittings are Corrosion and electrolysis free. Hose tail can be cut off to use with threaded fittings. (Size refers to hose size to suit tail end)

<b>NISF016A</b>	5/8" 16MM Angled skin fitting with nut
<b>NISF075</b>	19mm 3/4" skin fitting with nut
<b>NISF75A</b>	19mm 3/4" Angled skin fitting with nut
<b>NISF100</b>	25mm 1" skin fitting with nut
<b>NISF038</b>	1 1/2 38mm skin fitting with nut
<b>NISF050</b>	50mm skin fitting with nut
<b>NISF8035</b>	1/2" 3/8" ANGLED SKIN FITTING




NUT IN SKIN FITTINGS



NISF8035



LARGE WASTE NON RETURN VALVE

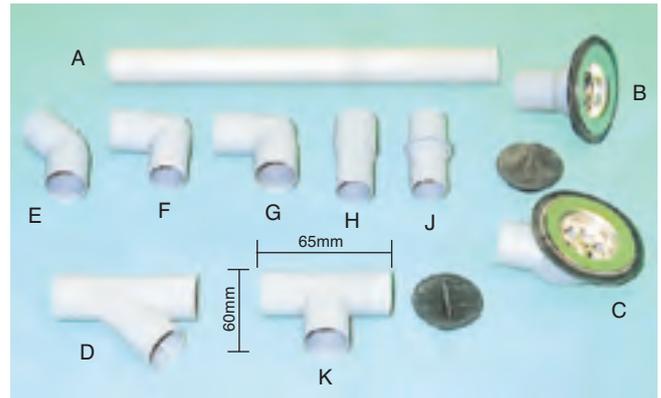

WD1319



WD1425G



WD1420G



WD1330



HY100



WD1421



WD8531



WD8532G SHOWN WITH WD8531 FITTED



WD8532B



HGWT25 WASTE WATER TRAP



HGWT

**WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



# SHURFLO PUMPS & ACCESSORIES




Water - Pumps

**Trailing pumps** for automatic pumping of fresh water on demand with the quality and reliability expected from Shurflo. Highly recommended by C.A.K. ideal for any vehicle or application.

- Heavy duty fully automatic triple diaphragm pumps
- Twin ball bearing drive & cast alloy motor casing
- Extremely smooth & efficient
- Self priming to 2.5m on 7ltr models and 3.6m on 10.6ltr models
- Runs dry without damage
- Slow running motor extends pump life
- Low amp draw & internal circuit breaker
- 2 barbed fittings and threaded strainer supplied with each pump



**Shurflo Marine Pumps see page 131**

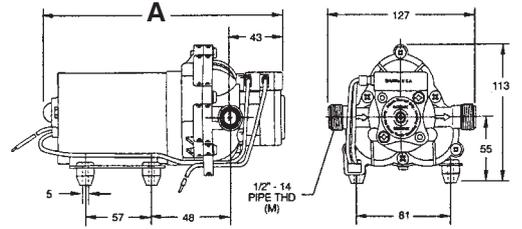

### SHURFLO TRAILKING PUMPS (FOR LAND BASE USE)

(2 barbed fitting & threaded strainer supplied with pump) Long standing reputation for quality and reliability. The pump of choice for professional use. C.A.K. highly recommends this product range.

**SHURFLO 2095 TRAILKING 7 - 7 ltr per min flow** high quality, heavy duty, fully automatic, self priming (2.5mtr), triple diaphragm pump. Extremely quiet & efficient. (pump isolation switch required use MC12N) **20 PSI** cut off pressure to suit cascade, Atwood, Malaga, Mini 8, Truma, Whale, Caravan boiler & Nautic Boiler. **30 PSI** cut off pressure to suit older instantaneous heaters, Paloma (not PH5 LFE), Rinnai, Vaillant.

**TRAILKING 10** as 2095 but increased **10.6 ltr** (2.3 gals) per min flow. Self primes to 3.6mtr

**For most Caravan and Motorhome applications the SF120720 is the required pump.**

**For most Caravan and Motorhome applications the SF120720 is the required pump.**

SF120720	SF2095 TRAILKING 7 LTR 12 VOLT 20 PSI
SF120730	SF2095 TRAILKING 7 LTR 12 VOLT 30 PSI
SF121020	SF2095 TRAILKING 10.6 LTR 12 VOLT 20 PSI
SF121030	SF2095 TRAILKING 10.6 LTR 12 VOLT 30 PSI
SF241030	SF2095 TRAILKING 10.6 LTR 24 VOLT 30 PSI

### 240V MAINS POWER SHURFLO PUMP

(2 barbed fitting & threaded strainer supplied with pump) Same design and performance as Trailing 10 pumps but running on 240 volts mains electric power. CE EMC approved.

**SF240V1030 SF2095 TRAILKING 10.6 LTR MAINS 240 VOLT 30 PSI**

### SHURFLO ACCESSORIES

SFELB050	SPARE SWIVEL ELBOW 1/2" PIPE BARB PUMP FITTING <b>A</b>
SFSTR050	SPARE SWIVEL STRAIGHT 1/2" PIPE BARB PUMP FITTING <b>B</b>
SFSGF1	SPARE SHUR-GUARD TWIST ON STRAINER + 1/2" PIPE BARB <b>C</b>
SFSGF2	SPARE SHUR-GUARD TWIST ON STRAINER + 1/2" THREAD <b>D</b>
SFSGF3	SPARE SHUR-GUARD INLINE STRAINER + 1/2" THREAD/ BARB <b>E</b>

### SHURFLO 182 ACCUMULATOR

Smooths water flow to reduce water surge and pressure switch machine gunning. Especially useful on semi rigid systems. High specification design to provide proficient operation, high quality construction.

**SFAC181 ACCUMULATOR TANK 182 WITH DIAPHRAGM**

### WHALE SUPERFILL

The easy and convenient way to fill caravan, motorhome & specialist vehicle on-board water tanks or cassette toilets from a water container. Removes the unnecessary effort in heavy lifting and pouring water into filler. Simply plug into socket and water will be pumped up into your filler from the hose. Uses submersible 12v DC electric pump, hose and electric plug assembly, Socket for connecting into the existing caravan electrical circuit. Full step by step instructions.

**WGP1332 SUPERFILL WATER FILLING PUMP KIT**

### NEW PORTABLE PUMP KIT

Ideal for washing down the car or boat, pumping diesel, showering, drinking water filling, Container filling/emptying, Spraying/garden watering, Bilge/storm water clearance and many more applications. Low voltage (8 amp, 12 Volt D.C) highflow submersible pump with adjustable on/off nozzle providing fine spray or a jet of water, 3.75m (12.5ft) food quality clear hose & 3.75m (12.5ft) cable with battery crocodile clips and a cigarette lighter plug.

### PORTABLE SHOWER KIT

New self contained portable shower canister. Ideal to shower off dogs, muddy boots, bicycles, or just hand washing. Built in 12 litre per min submersible pump with 4m of 12 volt connection cable & universal plug, Trigger shower handset pulls out of canister, hose (approx. 2 Mt.) is stored inside canister. Not to be used with hot water (warm tap water OK with care) or freezing conditions or pump may be damaged. Do not run dry. Canister size 290mm x 255mm x 390mm high.

**SKP50200 Portable shower kit 20L container 12volt.**



**WGP1332**



**WGP1642**



**WE NOW OFFER INSTALLATION SERVICE IN KENILWORTH BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



0844 414 2324



0844 414 2425



# COMET PUMPS TAPS & ACCESSORIES



## COMET IMMERSION PUMPS (10mm connections)

- CP130001** ELEGANT SUB PUMP, 12v, 8 Litres/min, delivery height max 5m, cable length 1mtr. Diameter 38mm x 104mm
- CP131001** ELEGANT SUB PUMP with air lock release, 12v, 8 Litres/min, delivery height max 5m, cable length 1mtr. Diameter 38mm x 120mm (3/8" & 1/2" barb hose connection)
- CP143012** VIP-PLUS SUB PUMP, 12v, 20 Litres/min, delivery height max 11m, cable length 1mtr. Diameter 48mm x 123mm
- CP160063** GEO SUB PUMP 12v, 14 Litres/min, delivery height max 7m, cable length 1mtr. Diameter 42mm x 125mm
- CP163077** GEO-PLUS SUB PUMP 12v, 18 Litres/min, delivery height max 10m, cable length 1mtr. Diameter 42mm x 125mm



CP130001 CP143012 CP160063 CP91410212

## COMET INLINE PUMPS (10mm connections)

- CP170063** GEO-INLINE PUMP, 12v, 14 Litres/min, delivery height max 7m, cable length 1mtr. Diameter 42mm x 150mm
- CP172077** GEO-INLINE-PLUS PUMP, 12v, 18 Litres/min, delivery height max 10m, cable length 1mtr. Diameter 42mm x 150mm



CP163077 CP170063 CP172077 CP91420212

## INLINE 12MM NON RETURN VALVE

- CP30080212** Inline Non-return valve for 12mm speedfit push fit plumbing.

## HOSE ADAPTORS FOR INLINE PUMPS

- CP91410212** Straight adaptor pump to 12mm speedfit push fit plumbing
- CP91420212** Elbow adaptor pump to 12mm speedfit push fit plumbing
- CP30040200** non return adaptor pump to 10mm (3/8") PVC Flexi
- CPC1060501** Straight air release adaptor pump to 10 / 12.7mm barb (3/8"-1/2") PVC Flexi hose.



CP30080212 CP30040200 CPC1060501 CPFS3330

## COMET DOME FOOTSWITCH

- CPFS3330** Comet dome footswitch 60 Ø x 20mm H

## COMET FLORENZ TAP

- DCT2371MN** 90Ø swiveling single lever mixer tap black / matt nickel effect with micro switch. 40mm high for glass lid sinks. Installation hole is 30mmØ thread length 35mm. Spout length 150mm.



DCT2371MN DCT2371C

## COMET FLORENZ SHOWER TAP

- DCT2385C** Single lever chrome mixer tap with 1/2" shower outlet & micro switch. 40mm high. Installation hole is 30mmØ thread length 35mm.



DCT2385C DCT2217C

## COMET LONDON TAP

- DCT2217C** Single lever mixer tap black / chrome effect with micro switch. 40mm high for glass lid sinks. Installation hole is 27mmØ thread length 29mm.

## COMET NOVO-SUPER

- Mounting holes 17mm Ø thread length 23mm. Mixer mounting hole centres 86mm. Height 185mm / 32mm spout folded. Max pressure 1.5bar. With micro switches.

- DCT2111MN** SINGLE TAP MATT NICKEL EFFECT
- DCT2115MN** MIXER TAP MATT NICKEL EFFECT
- DCT2111GY** SINGLE TAP MATT light grey/dark grey
- DCT2115GY** MIXER TAP MATT light grey/dark grey



DCT2115MN

## COMET STILO SINGLE LEVER MIXER TAP

- DCT4710C** Modern metal single lever domestic style tap with 360Ø swiveling spout. Mounting hole 38mmØ, Spout distance 200mm, Overall height 335mm. 12mm female push fit connections on flexi hoses. Suitable for pressurised water systems.



DCT2111GY DCT4710

## COMET TAP MICROSWITCHES

- DCT9210** Spare micro switch for ROMA, DUCALE, FLORENZ ranges
- DCT3025** Spare micro switch for NOVO SUPER & LONDON

## WHALE SHOWER SET

- WTT2000** Curved chrome riser bar with acrylic soap dish. Adjustable shower head location bracket, 1.5mtr flexible chrome hose & shower head.



WTT2000

On 3/8" BSP flexi tails use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.

WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)



### UNIVERSAL AUTOMATIC PUMP FOR LAND BASED & MARINE USE

An innovative design Quad pump from Whale. BUILT IN PRESSURE SWITCH, Self primes to 3m with flows of 8, 12 & 18 litres per minute. SMOOTH FLOW designed to pump sufficient water that flows smoothly and efficiently. QUIET designed for noise absorption to give quieter operation. FULLY ENCLOSED motor, wires & pressure switch (setting is not adjustable). LOW POWER CONSUMPTION energy efficient and kind to batteries. Now includes filter and 15mm push fit connections, adaptors for 1/2" hose available. Highly recommended by C.A.K.

- WUF0812 12 VOLT UNIVERSAL 8 LTR 15PSI      WUF1214 12 VOLT UNIVERSAL 12 LTR 30PSI  
WUF1212 12 VOLT UNIVERSAL 12 LTR 15PSI      WUF1215 12 VOLT UNIVERSAL 12 LTR 45PSI  
WUF1815 12 VOLT UNIVERSAL 18 LTR 45PSI

### NEW SMARTFLO VERTICAL

Variable pressure demand pump (30 PSI) automatically adjusts flow to meet outlet demand. Reduces the need of an accumulator tank in rigid piping systems. 12V DC only. Now installed vertically to save space.

- WUV0814 12 VOLT SMARTFLO VARIABLE DEMAND PUMP

### NEW AQUASMART VERTICAL

Compatible with all external pump caravan water systems, the Aquasmart upgrades water system from a plug in pump to a pressure diaphragm pump. Aquasmart is easy to install & provides better all round flow rates to your caravan. It replaces stand-alone pressure switches to reduce pulsing of water flow & has a built in replaceable carbon filter.

- WAQ0814 12 VOLT AQUASMART WATER DELIVERY SYSTEM  
WUH0814 SPARE PLUG AND HOSE ASSEMBLY WITH FILTER  
WWF3000 SPARE FILTER FOR AQUASMART SYSTEM

### CAK-SPA12 SUBMERSIBLE PUMP TO TANK ADAPTOR

Makes fitting of submersible pumps to C.A.K. TANKS onboard water tank systems very easy. Pump is easily removed for maintenance or replacement. Fits 1/2" PVC & 12 / 15mm Push fit

### SUBMERSIBLE ELECTRIC PUMPS

- WGP1002 GP1002 STANDARD SUBMERSIBLE PUMP 12 V Not illus  
WGP1352 PREMIUM SUB PUMP 12 V (PIC C)  
WGP1354 PREMIUM SUB PUMP 24 V (PIC C)

Anti-airlocking self-venting design improves performance. No priming problems being totally submerged. Output of 13.2 litres, 3.6 amps (GP1352/54) makes these pumps suitable for storage water heaters & showers in the smaller system. Can be fitted into onboard water tanks. Designed to pump fresh & saltwater. (GP1002 not self-venting for small single outlet system 10.3 lpm 2.4 amps)

- WGP1652 HIGH FLOW SUB PUMP 12 V (PIC D)  
The most powerful self-venting pump in the range provides up to 15.8 litres per min (3.8 amps). Suitable for fitting into onboard water tanks. Designed to pump fresh & saltwater.

### INLINE & BOOSTER PUMPS

- WGP1392 PREMIUM INLINE PUMP 12 V (PIC A)  
WGP1394 PREMIUM INLINE PUMP 24 V (PIC A)

Effective inline pump can be used to boost hand or foot pump systems. Output of 13.2 litres makes these pumps suitable for storage water heaters and showers in the smaller system. Suitable for fitting inline from onboard water tanks. Designed to pump fresh, saltwater & diesel.

- WGP1692 GP925 HIGH FLOW INLINE PUMP 12 V (PIC B)  
The most powerful inline pump in the range provides up to 15.8 litres per min. Suitable for fitting to onboard water tanks. Designed to pump fresh, saltwater and diesel.  
WWU1211 ADAPTOR 11-12 To connect sub and inline pumps to Whale and Speedfit 12mm push fit plumbing

### WHALE ACCESSORIES

- WWU7207 INLINE PRESSURE SWITCH  
Provides water on demand for many applications. Simple set up & installation for efficient pressurised system. For 1/2" PVC hose or 12mm Push fit plumbing.  
WBS7204 BUTTON SWITCH  
Neat little non latching push button control for pumps.  
WFS7210 FOOT SWITCH  
Simple & effective non latching contact switch for pump control. Can be mounted on floor or wall. Hands free operation of pump.  
WVF1227B PLASTIC 1/2" NON RETURN VALVE  
WVF1235 CHROMED BRASS 1/2" NON RETURN VALVE  
Ensures maintenance of prime in non self-priming systems. Chrome version recommended where hose clips have to be tight.

### WATERMASTER PLUG IN PUMP KIT

Simple system to allow submersible pump to be plugged into an external socket to pump water from an outside container into water system. Choose a socket, then watermaster plug & pump assembly to complete, All 12 volt only. Socket WES1000 can be used with Aquasource mains water kit to bring mains fed water directly into the water system, without pump operating.

- WES1000 WATERMASTER SOCKET FOR MICROSWITCH SYSTEM  
WES1001 WATERMASTER SOCKET WITH PRESSURE SWITCH

### WATERMASTER PLUG & PUMP ASSY

Replacement pump assembly for caravans with Whale Watermaster socket

- WEP1312 PREMIUM PUMP ASSY FOR WHALE 13.2 lpm  
WEP1612 HIGHFLOW PUMP ASSY FOR WHALE 15.8 lpm

### PLUG IN PUMP FOR CARVER TRUMA CRYSTAL SOCKETS

Direct replacement plug in pump assembly for Carver or Truma crystal water inlets.

- WEP1322 PREMIUM PUMP ASSY FOR TRUMA/CARVER  
WEP1622 HIGHFLOW PUMP ASSY FOR TRUMA/CARVER

### AQUASOURCE DIRECT MAINS WATER INPUT KIT

Provides direct water supply to caravans with whale Watermaster or Carver Truma sockets. Just plug into socket and pressure reducer in plug will allow mains water to run your water system. No need to run your pump while hooked up to mains water. Can be retrofitted to other systems by the addition of a WES1000 Watermaster socket and a non-return valve, it is then teed into the system after the pressure pump.

- WEM9401 AQUASOURCE MAINS WATER KIT  
WEM9403 AQUASOURCE 7.5 MTR EXTENSION HOSE

**UNIVERSAL**

1 YEAR WARRANTY


**NEW**



**WAQ0814**



**Sub pump adaptor**



**WAQ0814**



**Submersible Pumps**



A B C D



**WWF3000**



**WUH0814**



**WWU7207**

**WFS7210**




**WBS7204**



**FOOT/BUTTON SWITCH**

**WVF1227**



**WVF1235**



**WEP1312/WEP1612**



**Watermaster socket**



**WEP1322/WEP1622**



**WEM9401**





## ELEGANCE TAPS

Suitable for pressure or microswitch systems. Single taps base plate 113mm x 55mm (4 1/2" x 2 1/8") Mixer taps base plate 171mm x 62mm (6 3/4" x 2 1/2") Depth beneath surface 92 mm (3 5/8")

- WRT1007B** RT1000 white single tap long outlet
- WRT1010** RT1000 white single tap short Combo outlet
- WRT2010** RT2000 white mixer tap short Combo outlet
- WRT2007B** RT2007 white mixer tap long outlet

Microswitches need to be installed in taps where they are used to control non-automatic pumps, such as submersible pumps. Single tap requires one, a mixer tap 2 switches. When taps are used with fully automatic pumps such as Shurflo or universal pumps a microswitch is not required.

- WRT9000** Microswitch kit for elegance taps (pack of 2 switches)
- WRT1023B** Single control unit for elegance

## ELEGANCE SHOWERS

### COMBINATION SHOWER / MIXER UNITS

**WRT2500** handset with shower, tap & on / off function control. Can be used in the washbasin as a tap or as a shower by using a wall bracket or riser bar. Water flow can be temporarily shut off on showerhead maintaining the temperature setting. Retracting hose allows dual use of combo showerhead as a basin mixer tap. **WRT2500** combo tap/shower is suitable for installation in Contessa tip up sink see Page 68

- WRT2500** Mixer combo tap/ shower & wall bracket white
- WRT7500** Mixer combo tap/ shower & wall bracket beige
- WRT2525** Mixer combo with remote outlet white (to order only)

### ELEGANCE RISER BAR & WALL BRACKETS

Elegance Riser Bar provides 19 3/4" of height adjustment for combination handset showers. A wall bracket is a single point location fixture for a shower head it allows single alternative positions for the combo head.

- WRT1250** Shower wall bracket white
- WRT6250** Shower wall bracket beige
- WRT1750** Shower riser bar white
- WRT6750** Shower riser bar beige

### ELITE SINGLE LEVER TAPS

Single lever mixer tap with ceramic valves suitable for use on for pressurised or microswitch system. Suitable for direct fitting of 12mm Push-fit Piping, to fit 1/2" flexible PVC hose you will require 2 x WWU1282 adaptors. All Elite fitted with Microswitches. **Base diameter 58 mm, Hole diameter 48mm.**

- WMT0113** Elite single lever mixer tap chrome short spout
- WMT0111** Elite single-lever mixer tap chrome long
- WMT0161** Elite single-lever mixer tap diamond white long

### ELITE SINGLE LEVER SHOWERS

Shower comes complete with shower hose and handset. Requires Elite riser bar to hold showerhead in position this must be ordered with shower. All Elite fitted with Microswitches so are suitable for pressurised or microswitch systems. Suitable for direct fitting of 12mm Push-fit Piping to control valve, to fit 1/2" flexible PVC hose you will require 3 x WWU1282 adaptors. Shower hose connection block requires adapter CM451214FS for 12mm Push-fit, & additionally 1 x WWU1282 for 1/2" flexible PVC hose. Base dia. 58 mm, Hole dia. 50 mm.

- WMT0140B** Elite single-lever mixer shower chrome
- WRT1780B** Elite shower riser bar chrome
- WRT1770B** Elite shower riser bar white

### SWIM 'N' RINSE EXTERNAL SHOWER

Built in exterior shower compartment. Attractive design adds a touch of luxury to any boat or motorhome. Unit has a hinged cover with key lock, simple to install. 2.1 mtr hose (7 ft), On/off control on combo handset. Overall dimensions 167mm wide 298mm high. Colour white. BSP Male connections. Use SFELB050 Elbow or SFSTR050 Straight for PVC hose.

- WRT2662** Swim n' rinse external shower with lock

### SIMPLE FAUCETS

**WFT1152** TELESCOPIC FAUCET WHITE for use with foot or electric pumps. Faucet can be pushed down to fit neatly under most folding worktops & swivels 360°.

**WFT1268** TUCKAWAY FAUCET WHITE Fits into vertical side of sink or bowl, folding down into bowl when not in use. Faucet swivels 360°.

### SURGE DAMPER

Smooths water flow in the water system. Can reduce system noise and pulsations. Especially suitable for semi-rigid systems with submersible type pumps. It is a much-simplified version of an accumulator. Accumulators (see page 27) should be used with diaphragm pressure pumps to aid pressure switch control in the piping system, particularly when using push fit plumbing. Max 4 bar 60psi. Size L 213mm x Ø 50mm. Capacity 1/4 pint.

- WWU7205** Surge damper 12mm push fit connection
- WWS7215** Surge damper 15mm push fit connection

### AQUASOURCE CLEAR INLINE WATER FILTER

Provides clear fresh drinking water by removing unpleasant tastes and smells. Contains silver activated carbon that inhibits bacterial growth. Slim & compact, easy to install. Lasts one full season or 4500 litres whichever comes first.

- WWF1230** Aquasource clear inline water filter 12mm
- WWF1530** Aquasource clear inline water filter 15mm

### WHALE METAL SINGLE LEVER TAPS

Single lever chromed brass mixer taps with ceramic valves suitable for use on for pressurised systems only. Supplied with 1/2" flexible hose tails.

- WTT1111** Single Lever Kitchen Chrome Tap, 220mm spout 120mm high
- WTT1211** Swan Neck Kitchen Chrome Tap, 331mm spout 232mm high
- WTT1311** Single Lever Vanity Chrome Tap, 140MM spout 70mm high



**ELEGANCE LONG MIXER**



**ELEGANCE COMBO SHOWER**



**ELEGANCE COMBO SHOWER**



**ELITE TAPS**



**ELITE SHOWERS**



**WRT 2662**



**TELESCOPIC**

**TUCKAWAY**



**WWS7205 SURGE DAMPER**



**WTT1211**



**WTT1111**



**WTT1311**

WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)



### DLT539 TAP FOR SMEV 8000 SERIES

**DLT539** Single lever tap neat and compact styling. Comes in attractive colour of Matt Nickel and black trim. Good colour match to SMEV stainless range. Suitable for use with pressurised & micro switched water systems. Connections suitable for 12mm & 10mm (1/2" & 3/8") flexible PVC hose. This mixer tap will fit Smev 8000 series sinks. 25mm Hole cut out, spout length 85mm end to centre of tap.

**DLT539** Matt nickel single lever mixer tap for Smev 8000 series sinks

### DLT540 SINGLE TAPS AND DLT541 MIXER TAPS.

Modern good quality taps in a range of colours. Compact design allows them to be fitted in most situations. Suitable for pressurised & microswitched water systems. Connections suitable for 10mm (3/8") flexible PVC hose, for 12mm (1/2") flexible PVC hose you will require a **DLTBARB** for each water connection.

The **DLT541W** mixer in white is the only tap suitable to fit the Cleo tip up basin (see page 68)

The **DLT540C** Matt Nickel is the most popular single cold tap that will fit Smev 8000 series

- DLT540B** Single tap + microswitch colour Beige
- DLT540BR** Single tap + microswitch colour Brown
- DLT540W** Single tap + microswitch colour White
- DLT540C** Single tap + microswitch Matt Nickel effect
- DLT541B** Mixer tap + microswitch colour Beige
- DLT541W** Mixer tap + microswitch colour White
- DLT541C** Mixer tap + microswitch Matt Nickel effect
- DLTBARB** Adaptor for 540/ 541 range for 12mm (1/2") PVC hose

### EXTERNAL VERTICAL SHOWER UNIT

The external shower kit has a ceramic valve operated chromed brass mixer unit and a pull out shower with 2 metres of hose. Box requires cut out of 185mm x 108mm, Maximum wall thickness 40mm. Overall flange size 233mm x 153mm. Supplied with flexi tails 3/8" BSP male thread. Suitable for pressurised water systems only. Box only also available without shower kit.

- DLTEXVS** External vertical shower kit white
- DLTEHL** External housing only with lock

### MINI EXTERNAL PLUG IN SHOWER UNIT

The mini external shower kit has a quick connect plug in water valve. The trigger showerhead and its 2 metre hose simply plug in with a click. Housing cut out 59mm diameter, Flange diameter 82 mm. Suitable for pressurised water systems only. Box only also available without shower kit.

**DLTMES2W** Mini External plug in shower unit with 2 m hose

### EXTERIOR PULL OUT SHOWER UNIT

The new exterior pull out shower kit has a ceramic valve operated chromed brass mixer unit and a pull out shower with 2 metres of hose. Box requires cut out of 95mm diameter, Maximum wall thickness 70mm. Overall flange size 126mm x 132mm. Supplied with flexi tails 3/8" BSP male thread. Suitable for pressurised water systems only. Box only also available without shower kit.

- DLTEXS4** Exterior vertical shower kit 4 white
- DLTEXS4STSHW** Spare white trigger shower head for DLTEXS4
- DLTEH4** Exterior housing 4 only

### TRIGGER SHOWER HEADS

Replacement trigger shower head for better on-off control of showering at the head. Depress trigger and water will flow to suit, Push trigger down and forward to lock on body the shower will then be on all the time. Both have 1/2" male thread to easily connect to most shower hoses.

- DLTTSHC** Spare Trigger head chrome 1/2" bsp male thread
- DLTTSHW** Spare Trigger head white 1/2" bsp male thread

### THRU WALL OR COUNTERTOP SHOWER MIXERS

These new showers either fix through the mounting surface (**DLTSHMCC**) or mounts onto surface (**DLT3440C**). All connections, hot & cold in and mixed out, are behind the mixer control. This allows all the piping to be hidden within the wall or under the countertop. Use **DLTSWC** to connect the mixed output to the shower hose.

- DLTSHMCC** Thru wall shower control chrome (3 x 1/2" BSP female conn.)
- DLT3440C** Single lever under mixer control shower
- DLTSWC** Thru wall water connection for showers (3/8" male connection)

### SHOWER KIT

Chrome Shower head with Chrome hose 150cm long and fixed position shower wall holder. 3/8" BSP female connection.

**DLTSK3420C** Chrome shower kit, Handset, Hose & Fixed Bracket  
**On 3/8" BSP flexi tails use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.**

### EXTERNAL MIXER SHOWER POINT

The External Mixer Shower point comes complete with a Trigger Shower head assembly (shower fitting, 1.5m long shower hose and swivel control connector). Inserting the shower assembly, with a push and turn action, locks it in place and turns on the water. Temperature is adjusted by turning the connector assembly. 15mm male push fit connections on rear. Requires 60mm dia mounting hole

**DLTEXS688** External Mixer Shower Point, Trigger Handset & Hose

### AQUA-STOP WATER ECONOMISER FOR SHOWER HOSE

The Aqua-Stop connects between the shower hose and shower head of conventional 1/2" thread. With a simple push on off action to halt the water flow.

**DLTSTP150** Aqua-stop water shower economiser Chrome

### STOP WATER ECONOMISER FOR KITCHEN TAPS

The Stop water connects in place of the aerator in the end of the spout of modern taps. Any sideways contact with the wand allows water flow after contact it centres naturally to turn off.

**DLTSTP085** Stop Water kitchen tap economiser Chrome

### ANTI TWIST SHOWER HOSE SWIVEL UNION

Connects in shower hose to allow rotation of joint preventing hose knotting up.

**DLTDCC250** Anti twist shower hose swivel union Chrome



**DLT539 MIXER TAP**



**DLT 540 SINGLE TAPS**


**DLT 541 MIXER TAPS**



**DLTEXVS**



**DLT MES2W**



**DLTEXS4**



**DLTTSHC**



**DLTSHMCC**



**DLTTSHW**



**DLT3440C**



**DLTSWC**



**DLTSTP150**



**DLTSTP085**



**DLTDCC250**



**DLTEXS88**

On 3/8" BSP flexi tails use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.

**WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



0844 414 2324



0844 414 2425

## PELIKAN SINGLE LEVER TAP

The Pelikan is elegant and modern in style. A ceramic cartridge and the use of high-quality chromium plated plastic materials guarantee quality and durability. When necessary the cartridge can be exchanged without removing the tap. The spout is 360° making the tap easy to install and use. With a microswitch the tap is suitable for submersible pumps, the switch is completely waterproof to IP67, and has a capacity of 4 amps. When used with automatic pressure switched diaphragm pumps the tap is designed to cope with 6 bar pressure. Installation hole is 33mmØ. Spout length 140mm from centre of installation hole. Hose connections for 10-12mm PVC hoses. Chrome plastic body with matt-chrome lever & spout tip. Pull out shower spout length 185mm.

- DLT5729** Pelikan single lever tap. Chrome/matt-chrome.
- DLT5728** Pelikan single lever pull out shower tap. Chrome/matt-chrome.

## TWIST SINGLE LEVER TAP

Single lever tap with neat and compact styling and ceramic cartridge for quality and reliability with ease of use. Comes in attractive colours of Matt Nickel with black trim or all chrome. Matt-nickel is a good colour match to Smev stainless range. Suitable for pressurised & microswitched water systems. Installation hole is 39mmØ. Spout length 120mm from centre of installation hole. Overall height of body 40mm. Connections suitable for 12mm & 10mm (1/2" & 3/8") flexible PVC hose. The Twist taps will not fit Smev 8000 series sinks.

- DLT575MN** Twist single lever mixer tap matt nickel
- DLT575C** Twist single lever mixer tap chrome

## KERAMIK STYLE SINGLE LEVER TAP

Very modern styled single lever tap with ceramic cartridge for quality and reliability with ease of use. Comes in attractive Matt Nickel colour. Suitable for pressurised & microswitched water systems. Installation hole is 33mmØ. Spout length 112mm from centre of installation hole. Overall height of body 40mm. Connections suitable for 12mm & 10mm (1/2" & 3/8") flexible PVC hose.

- DLT557MN** Keramik style single lever mixer tap matt nickel.

## LIVORNO PULL-OUT SHOWER TAP WITH TRIGGER HANDSET

A modern mixer tap to match Lugano & Carletta with retractable shower hose. A good choice for kitchen or bathrooms. Chrome brass construction, with trigger adjustable shut-off hand shower with 1.5m hose. Mounting hole 33mmØ. Use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing. Suitable for pressurised water systems only. The control knobs are chrome to match Lugano and not clear acrylic as pictured.

- DLT4343C** Livorno shower mixer, chrome metal body, chrome trigger shower

## LUGANO MIXER TAP

Very smart high quality heavy gauge chromed brass monobloc mixer tap for long lasting style and reliability. Designed to match Carletta and Livorno models. Mounting hole 27mmØ. Use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing. Suitable for pressurised water systems only.

- DLT4213C** Lugano mixer tap chrome, 3/8"BSP female connection
- DLT42175C** Lugano mixer tap satin chrome, 3/8"BSP female connection

## DUCALE SINGLE LEVER MIXER TAP

Modern metal single lever domestic style tap with swiveling spout. Single lever ceramic valves for ease of use and reliability. Mounting hole 27mmØ. Spout length 190mm. Use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing. Suitable for pressurised water systems OR microswitched where available.

- DLT4502W** Ducale mixer, white, 3/8"BSP male connection
- DLT4502C** Ducale mixer, chrome, 3/8"BSP male connection
- DLT4503C** Ducale mixer, chrome, 12mm female JG connection **Microswitched**
- DLT4502SC** Ducale mixer, satin chrome, 3/8"BSP male connection

## ROMA SINGLE LEVER MIXER TAP (with microswitches)

Modern single lever domestic style tap with swiveling spout to similar style of Ducale and Elite. Single lever ceramic valve for ease of use and reliability. Mounting hole 33mmØ. Spout length long or short version. With hose barbs to connect 1/2" PVC hose. Suitable for microswitch or pressurised water systems. (Not pictured)

- DLT2751C** Roma single lever mixer, chrome effect, short spout
- DLT2771C** Roma single lever mixer, chrome effect, long spout

## DUCALE SINGLE LEVER MIXER FIXED SHOWER

Modern metal single lever fixed shower, having the same specifications as Ducale mixer tap. Requires Helena chrome shower hose and head kit supplied separately.

- DLT4510C** Ducale shower mixer, chrome, 3/8"BSP male connection
- DLT4511C** Ducale **Microswitched** shower mixer, chrome, 3/8"BSP male shower connection. 12mm female JG water connections
- DLT4510SC** Ducale shower mixer, satin chrome, 3/8"BSP male connection
- DLT2940C** HELENA chrome showerhead, shower rail, soap dish & 1.5m chrome hose with 3/8" female connector to valve.

## CONCEALED THERMOSTATIC SHOWER MIXER

Our Concealed Thermostatic Shower Mixer is safe for all the family to use, there is a temperature override button set at 38 degrees centigrade that makes it difficult for young children to select the highest temperatures.

Almost all of our taps and showers are manufactured from high quality Brass the finish of the product is polished Chrome which is of a very high standard. The TMV valve incorporates 180° ceramic disc headwork for utmost reliability.

Our thermostatic showers operate at their best with a hot and cold water pressure of 1.0 bar minimum pressure and above. Please ensure your chosen pump is powerful enough to allow the shower to work efficiently. We recommend use of a Shurflo or Whale universal diaphragm pump at 30psi.

Installation holes for thermostatic mixer valve & flow control valve are 28mmØ and 42mm Ø at 70mm centres, wall thickness up to 15mm. Water connections 1/2" BSP male threads.

- DLT701703** Concealed Thermostatic Shower Mixer Chrome.



**DLT5729**

**DLT575**



**DLT557MN**



**DLT4343C**



**DLT4213C**



**DLT4502C/DLT2771C**



**DLT4510C**



**DLT2940C**



**DLT701703**



**WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



## MINIMAL SINGLE LEVER KITCHEN TAP

High spec domestic style chrome single lever mixer tap with swiveling spout and ceramic valves. Base plate size 43 mmØ. Installation hole is 30mmØ. Connections 3/8" BSP male flexi tails. Suitable for use on pressurised water systems only.

**DST3010C** MINIMAL SINGLE LEVER KITCHEN MIXER CHROME

## MINIMAL SINGLE LEVER SHORT TAP

Quality chromed single lever mixer tap with spout and ceramic valves. Base plate size 31 mmØ, Installation hole is 25 mmØ. Spout length 140mm end to ctr of tap. Connections 3/8" BSP male flexi tails. Suitable for use on pressurised water systems only.

**DST3030C** MINIMAL SINGLE LEVER MIXER SHORT CHROME

## MINIMAL SINGLE LEVER SHOWER MIXER

Thru counter single lever mixer shower control with ceramic valve.. 3 connections, Hot/Cold in and Mixed out use 3/8" BSP male flexi tails. Suitable for use on pressurised water systems only. Use thru wall connection (DLTSWC pictured page 31) to connect mixer to suitable shower hose and head set.

**DST3050C** MINIMAL SINGLE LEVER SHOWER MIXER

**DLTSWC** THRU WALL WATER CONNECTION FOR SHOWERS (See Page 31)

## ESSENCE RANGE OF TAPS SHOWERS & ACCESSORIES

### Essence - Big on style small on size

New small footprint tap range with the 'essence' of design. Quality chromed brass domestic style single lever mixers for Kitchen, Basin or shower. Available with a matching range of accessories.

Single lever chrome mixer with long swiveling spout. Base plate size 43 mmØ, Installation hole is 25 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. Spout length 190mm.

**DST8010C** ESSENCE SINGLE LEVER MIXER LONG CHROME

Single lever chrome mixer with short spout. Base plate size 32 mmØ, Installation hole is 25 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. 120mm spout.

**DST8030C** ESSENCE SINGLE LEVER MIXER SHORT CHROME

Tall single lever chrome mixer with short swiveling spout. Ideal for the kitchen tap is 225mm high. Base plate size 32 mmØ. Installation hole is 25 mmØ. Spout 135mm. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DST8035C** ESSENCE TALL SINGLE LEVER MIXER SHORT

Matching single lever chrome shower mixer control. With 3/8" BSP connection for shower hose. Base plate size 32mmØ, Installation hole is 25 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. Any of our other shower kits will fit this 3/8" BSP connection.

**DST8050C** ESSENCE SINGLE LEVER SHOWER MIXER

**DLTSK8115CS** MINIMA SHOWER KIT & RISER BAR CHROME AND SATIN CHROME (See Page 34)

## ESSENCE ACCESSORIES

A range of matching Essence accessories are available on our website or ask for the supplementary leaflet.

## MARIN MINIMAL ACCESSORIES

Range of matching Marin Minimal chrome accessories of reduced size perfectly suited to accessorise any bathroom with style.

**DST35050005C** MARIN BATHROOM GLASS AND HOLDER CHROME

**DST35100010C** MARIN SOAP DISH AND HOLDER CHROME

**DST355050C** MARIN PUMP SOAP DISPENSER & HOLDER CHROME

**DST3515C** MARIN DOUBLE COAT HOOK CHROME

**DST3535C** MARIN TOILET ROLL HOLDER CHROME

**DST3525C** MARIN 30CM TOWEL RAIL CHROME

Wall mounted toilet brush holder with specially developed shaped rubber brush for effective cleaning while providing long lasting service.

**DST3540C** MARIN TOILET BRUSH & HOLDER CHROME



**DST3010C**



**DST3030C**



**DST8010C**



**DST8030C**



**DST8035C**



**DST8050C**



**DST35050005C**



**DST35100010C**



**DST355050C**



**DST3525C**



**DST3535C**



**DST3540C**



**DST3515C**

On 3/8" BSP flexi tails use BRP3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.

**WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)**



**0844 414 2324**



**0844 414 2425**



# ULTIMATE TAPS & SHOWERS



Only top quality materials are used in our ultimate & designer taps. Materials which take the stresses and strains of a long product life.

### WAVE SWAN SINGLE LEVER MIXER TAP

Stylish 'wave' shaped control lever high quality chromed brass single lever mixer tap. Heavy gauge chromed brass for long lasting style and ceramic cartridge for reliability. Swan neck faucet swivels 360°. Base plate size 50 mmØ, Installation hole is 35 mmØ. Spout length 170mm from centre of installation hole. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTWSMC** WAVE SWAN SINGLE LEVER MIXER TAP



**DLTWSMC**



**DLTWBSNC**

### WAVE SWAN BASIN SINGLE LEVER MIXER

A new addition to our stylish 'wave' range the basin tap is a single lever chromed brass design with ceramic cartridge valve. Base plate size 56 mmØ, Installation hole is 35 mmØ. Spout length 130mm from centre of installation hole. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTWBSNC** WAVE SWAN BASIN SINGLE LEVER MIXER TAP

### SINGLE LEVER MIXER PULL OUT SHOWER

Streamlined design chromed brass body with ceramic cartridge valves. Pull out chromed shower head with push button adjustable spray head (chrome) and 1.8 metre flexible grey chrome hose. Base plate size 55 mmØ, Installation hole is 35 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTLPSC** SINGLE LEVER MIXER PULL OUT CHROME SHOWER



**DLTLPSC**



**DLT3470C/DLT3481C**

### SINGLE LEVER MIXER TAP

Very smart single lever tap with ceramic cartridge for quality and reliability with ease of use. Chromed brass body for quality and long life. Long and short spout available as well as basin design. Base plate size 45 mmØ, Installation hole is 32mmØ. Spout length from centre of installation hole: **DLT3451C** short 150mm, **DLT3470C** Medium 190mm, **DLT3481C** long 240mm, **DLT3831C** basin 110mm. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLT3451C** LUX SINGLE LEVER MIXER TAP SHORT 150mm SPOUT  
**DLT3470C** SINGLE LEVER MIXER TAP MEDIUM 190mm SPOUT  
**DLT3481C** SINGLE LEVER MIXER TAP LONG 240mm SPOUT  
**DLT3831C** LUX SINGLE LEVER BASIN MIXER CHROME



**DLT3661C**



**DLT3451C**

### SINGLE LEVER MIXER SHOWER CONTROL

Modern single lever fixed shower, having the same specifications as Lux mixer tap. High quality chromed brass construction. Requires Helena or Minimal chrome shower hose and head kit supplied separately. Base plate size 45 mmØ, Installation hole is 32 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLT3660C** SINGLE LEVER SHOWER CONTROL  
**DLT3661C** LUX SINGLE LEVER SHOWER CONTROL

### TETRA MONOBLOC MIXER

Quality chromed brass domestic style monobloc mixer with swiveling spout. Base plate size 45 mmØ, Installation hole is 25 mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTTMC** TETRA MONOBLOC CHROME MIXER



**DLTTMC**

### SHOWER KIT MINIMA

Chrome Shower head with flexible jets to prevent the buildup of limescale. Chrome hose is 150cm long combined with Minimal styled riser bar. 3/8" BSP female connection.

**DLTSK8115C** MINIMA SHOWER KIT WITH RISER BAR CHROME  
**DLTSK8115CS** MINIMA SHOWER KIT WITH RISER BAR SATIN CHROME



**DLTSK8115C**

### SHOWER WALL BRACKET

Wall mounting bracket for locating shower head on wall. Available in 2 versions. SHC manufactured in chromed ABS, SBC MADE FROM CHROMED BRASS

**DLTSHC** FIXED WALL BRACKET FOR SHOWER HEAD  
**DLTSBC** ADJUSTABLE ANGLE WALL BRACKET FOR SHOWER HEAD



**DLTSHC**



**DLTSBC**

### COMPACT PULL OUT SHOWER SINGLE LEVER MIXER TAP

Smart styled single lever ceramic cartridge mixer pullout shower tap with trigger shower handset. Simply squeeze the trigger for water to flow as and when you require or flip up the lever to lock at 90 degrees and the water is fully on. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. Spout length 135mm approx.

**DLT3400C** SINGLE LEVER MIXER PULL OUT CHROME SHOWER



**DLT3400C**

### CHROME TOWEL RAIL

Smart high quality chromed brass towel rail 310mm overall length  
**DLTTRL** CHROMED BRASS TOWEL RAIL 310mm



**DLTTRL**

On 3/8" BSP flexi tails use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.

WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)



Only top quality materials are used in our ultimate & designer taps. Materials which take the stresses and strains of a long product life.

### NEW LAUSANNE FLIP CHROME FOLDING MIXER

The LAUSANNE FLIP folding faucet mixer tap is elegant and modern in style. Produced from heavy gauge chromed metal for long lasting reliability. Installation hole is 33mmØ. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. Suitable for installation in SMEV folding glass sinks. Tap is 40mm high when folded.

**DCT4700C** LAUSANNE FLIP CHROME FOLDING MIXER



**DCT4700C**



**DLTMMC**

### MARINE FOLDING SINGLE TAP

Marine high quality chromed brass single tap. Heavy gauge chromed brass for long lasting style. Installation hole is 16mmØ. Spout length 140mm from centre of installation hole. Connection 3/8" BSP male thread. Suitable for pressurised water systems only. Suitable for installation in SMEV folding glass sinks. Tap is 39mm high when folded

**DLTMSC** MARINE SINGLE CHROME TAP



**DLTMSC**



**DLTLPM**

### MARINE FOLDING MIXER TAP

Marine high quality chromed brass mixer tap. Heavy gauge chromed brass finish complements the design. Installation holes 2 x 16 mmØ at 60mm centres. Spout length 140mm from centre of installation hole. Connections 2 x 3/8" BSP male thread. Suitable for pressurised water systems only. Suitable for installation in SMEV folding glass sinks. Tap is 39mm high when folded

**DLTMMC** MARINE MIXER CHROME TAP

### STYLE SINGLE LEVER MIXER TAP

Very smart single lever tap with ceramic cartridge for quality and reliability with ease of use. Chromed brass body for quality and long life. Installation hole is 26 mmØ. Spout length 140 mm from centre of installation hole. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only. Suitable for installation in SMEV folding glass sinks. Tap is 37mm high when folded

**DLTSTMIN** STYLE SINGLE LEVER MIXER



**DLTSTMIN**



**DLTCSMC**

### LUX SINGLE LEVER PILLAR MIXER

Chrome single lever mixer with curved faucet, which swivels 360°, and ceramic cartridge valves for smooth operation. Base plate size 50 mmØ, Installation hole is 38 mmØ. Spout length 175 mm from centre of installation hole. Connections 3/8" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTLPM** LUX CHROME PILLAR MIXER

### SINGLE PILLAR TAP

Smart design chromed brass body with 360° swivel faucet. Reliable and easy to install cold tap. Base plate size 38 mmØ, Installation hole is 20 mmØ. Connection 1/2" BSP male flexi tails. Suitable for pressurised water systems only.

**DLTPTC** PILLAR SINGLE CHROME TAP



**DLTPTC**



**DLTCSMC**

### COMPACT SINGLE TAP

Simple compact design chromed brass body single tap with folding spout. Reliable and easy to install cold tap. Base plate size 28 mmØ, Installation hole is 16 mmØ. Connections 3/8" BSP male inlet. Suitable for pressurised water systems only.

**DLTCSC** COMPACT SINGLE CHROME TAP

### COMPACT MIXER TAP

Simple compact design chromed brass body mixer tap with folding spout. Reliable and easy to install mixer tap. Base plate 2 x 28mmØ at 86mm centres, Installation holes are 2 x 16mmØ. Connections 3/8" BSP male inlets. Suitable for pressurised water systems only.

**DLTCMC** COMPACT MIXER CHROME TAP



**DLTCMC**



**DLTSH1501212C**

### COMPACT MIXER SHOWER TAP

Simple compact design chromed brass body mixer shower tap with 3/8" BSP shower connection. Requires Helena or Minima chrome shower hose and head kit supplied separately. Or add a **DLTSH150GN** hose from below and a trigger handset for a simple controllable shower. Reliable and easy to install shower tap. Base plate 2 x 28mm at 86mm centres, Installation holes are 2 x 16mmØ. Connections 3/8" BSP male inlets. Suitable for pressurised water systems only.

**DLTCSMC** COMPACT SHOWER MIXER CHROME

### GREY NYLON SHOWER HOSE

Good quality flexible grey nylon shower hoses with chrome end connections.

**DLTSH150GN** GREY SHOWER HOSE 150CM 1/2" C & 3/8" Fem chrome ends

**DLTSH2350GN** GREY SHOWER HOSE 200CM 3/8" Fem & 15/1 Male Chrome ends

### CHROME SHOWER HOSE

Good quality flexible chrome shower hoses with chrome end connections.

**DLTSH1501212C** CHROME SHOWER HOSE 150CM 1/2" C Fem & 1/2" Female chrome ends

**DLTSH2001212C** CHROME SHOWER HOSE 150CM 1/2" C Fem & 1/2" Female chrome ends

**DLTSH150C** CHROME SHOWER HOSE 150CM 1/2" C Fem & 3/8" Female chrome ends

**DLTSH200C** CHROME SHOWER HOSE 200CM 1/2" C Fem & 3/8" Female chrome ends

### SPARE FLEXIBLE TAP TAILS

**DLTTL20** SPARE 20CM TAIL STEEL BRAIDED 3/8BSP MALE.

**DLTTL40** SPARE 40CM TAIL STEEL BRAIDED 3/8BSP MALE.

**DLTTL25** SPARE 25CM WHITE BRAIDED PVC TAIL 3/8BSP MALE.

**DLTTL30** SPARE 30CM WHITE BRAIDED PVC TAIL 3/8BSP MALE.

On 3/8" BSP flexi tails use BRF3812 brass female barbs to connect 1/2" PVC hose, or CM451213FS to connect to 12mm push fit plumbing.



**DLTSH150GN**



**DLTSH2350GN**

WE NOW OFFER INSTALLATION & REPAIR SERVICE BY [SupremeTech.co.uk](http://SupremeTech.co.uk)



**0844 414 2324**



**0844 414 2425**